



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	DESCRIPTION
1	ORIGINAL
2	ADD DAUGHTER BOARD RECOMMENDATION R.STAJAMONICA FEB.20/2014

SPECIFICATIONS:

- 1- CONTACT MATERIAL: PHOSPHOR BRONZE
- 2- INSULATOR MATERIAL: GREEN DIALYL PHTHALATE, UL 94V-0
- 3- CONTACT PLATING: GOLD OVER NICKEL ALL OVER
- 4- CURRENT RATING: 5 AMPERES.
- 5- CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.
- 5- INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM.
- 6- DIELECTRIC WITHSTANDING VOLTAGE: 1800 VAC RMS AT SEE LEVEL.
- 7- INSERTION AND WITHDRAWAL FORCES: 16oz AND 10z RESPECTIVELY PER CONTACT PAIR
- 8- OPERATING TEMPERATURE: -65°C TO +125°C

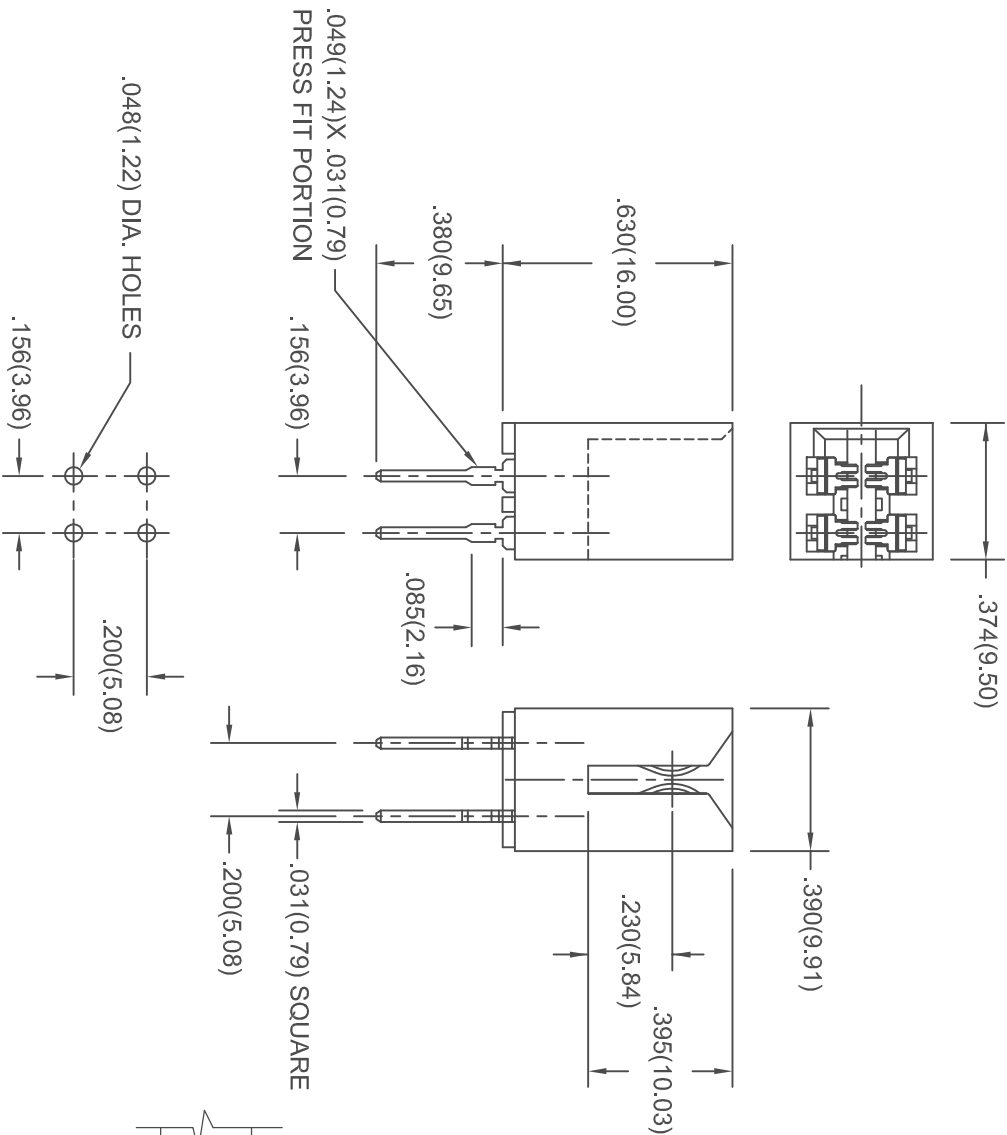

RECOMMENDED DAUGHTER BOARD

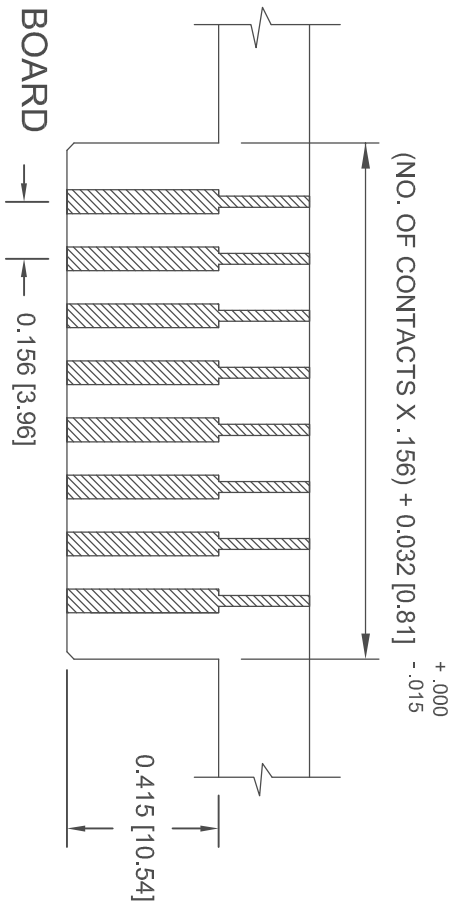

THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2011/65/EU FOR ROHS COMPLIANCY.

**368 SERIES CARD EDGE R/ANGLE CONNECTOR
.156(3.96) CONTACT SPACING (END MODULE)**

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

REF. 368-004-520-201	DATE: JUL. 21/10
DRAWN: F.BRIONES	
PART NUMBER	
368-004-520-201	
DRAWING NUMBER	
368-004-520-201	
ISSUE	
2	