


THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	DESCRIPTION	DATE
1	ORIGINAL	
2	ADD DAUGHTER BOARD RECOMMENDATION	AUG. 11/2015


**SPECIFICATIONS:**

- 1- CONTACT MATERIAL: PHOSPHOR BRONZE
- 2- INSULATOR MATERIAL: GREEN DIALYL PHTHALATE, UL 94V-0
- 3- CONTACT PLATING: GOLD OVER NICKEL ALL OVER
- 4- CURRENT RATING: 5 AMPERES.
- 5- CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.
- 5- INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM.
- 6- DIELECTRIC WITHSTANDING VOLTAGE: 1800 VAC RMS AT SEE LEVEL.
- 7- INSERTION AND WITHDRAWAL FORCES: 16oz AND 10z RESPECTIVELY PER CONTACT PAIR
- 8- OPERATING TEMPERATURE: -65°C TO +125°C

(NO. OF CONTACTS X .156) + 0.032 [0.81]

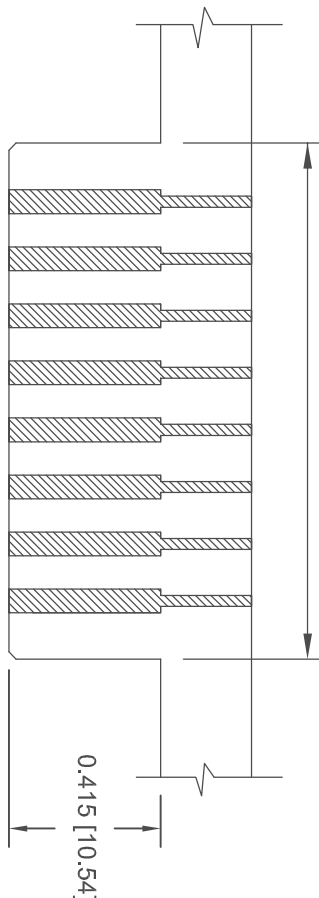

**RECOMMENDED DAUGHTER BOARD**

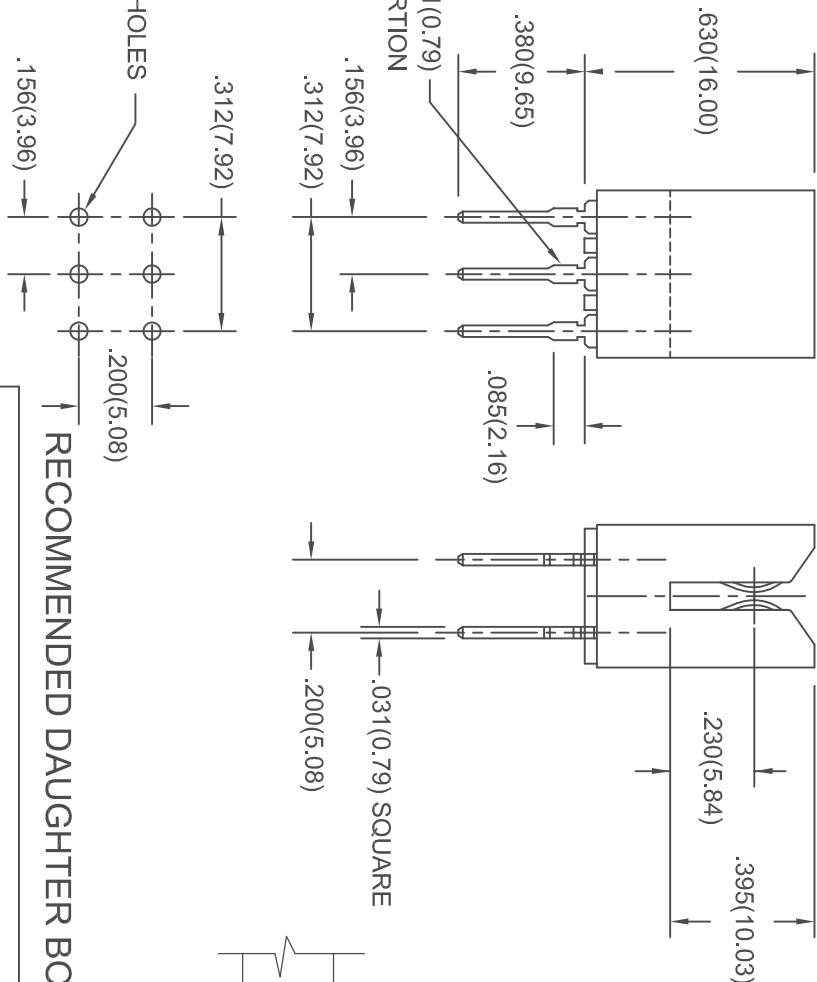

**368 SERIES CARD EDGE R/ANGLE CONNECTOR  
.156(3.96) CONTACT SPACING (CENTER MODULE)**



THIS SERIES FULLY CONFORMS TO THE  
EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR ROHS COMPLIANCY.



EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

REF. 368-006-520-201		
DRAWN: F. BRIONES	DATE: JUL. 21/10	
PART NUMBER	368-006-520-201	
DRAWING NUMBER	368-006-520-201	
ISSUE	2	