
12.60 ±0.38	8.36 ±0.25	2.84		53.00 ±0.38 47.04 ±0.25 38.96		
	_		-	<b>(a)</b>	Ç	
				_		2.77 1.385
			_1	0°		







.XXX ±0.10

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

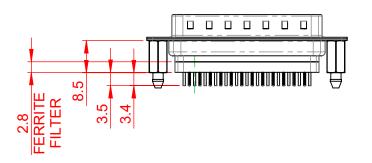

ISSUE NUMBER **ORIGINAL** 





## NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C to +85°C

**CURRENT RATING: 3A PER CONTACT** CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

PART NUMBER:

## 627 SERIES D-SUB CONNECTOR



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 627 ASSEMBLY						
DRAWN: C.B	DATE: AUG. 01/2018					
CHECKED:	DATE:					
SCALE: 1:1	SHEET 1 OF 1					
DRAWING NUMBER: 627-025-2	228-246 ISSUE					

627-025-228-246

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.