




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




**ISSUE NUMBER** ORIGINAL (1)

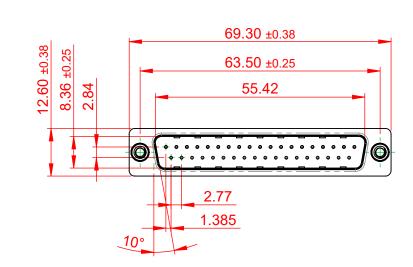

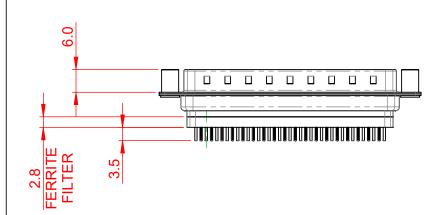





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C to +85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	627 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 627 ASSEMBLY		
			DRAWN: C.B	DATE: AUG. 01/20	)18
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1	SHEET 1 OF	1
			DRAWING NUMBER: 627-037-	228-248	ISSUE
			PART NUMBER: 627-037-	228-248	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

SW REFERENCE NO.: 627 ASSEMBLY					
DRAWN: C.B	DATE: AUG. 01/2018				
CHECKED:	DATE:				
SCALE: 1:1	SHEET 1 OF 1				
DRAWING NUMBER: 627-037-2	228-248 ISSUE				
PART NUMBER: 627-037-2	228-248 1				