

| TOLERANCE UNLESS OTHERWISE SPECIFIED | |
|--|-------|
| .X | ±0.25 |
| .XX | ±0.15 |
| .XXX | ±0.05 |


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL



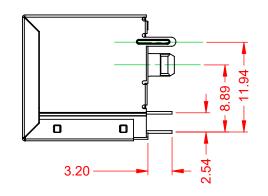

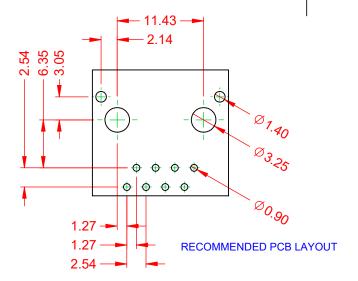

NOTES:

1. MATERIALS:

INSULATOR: PBT, BLACK, UL 94V-0

SHIELD: BRASS (T=0.2mm), NICKEL PLATED CONTACT: PHOSPHOR BRONZE (T=0.35mm),

SELECT 50µ" GOLD PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

2. VOLTAGE RATING: 125 VAC RMS 3. CURRENT RATING: **1.5 AMPS** 4. CONTACT RESISTANCE: 20mΩ MAX

1000 MΩ MIN @ 500V DC 5. INSULATOR RESISTANCE:

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

1500VDC CONTACT TO SCREEN AND TEST PANEL

6. DURABILITY: 750 CYCLES MIN 7. MATING/UNMATING FORCE: 30N/3.06KG MAX 8. RETENTION STRENGTH: 50N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C 10. STORAGE TEMP: -40°C TO +85°C

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RJ45, VERTICAL, WITH PEG



1.27

2.54

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| ACAD REFERENCE NO.: J2L Assembly | |
|----------------------------------|--------------------|
| DRAWN: Y.Z | DATE: DEC. 11/2019 |
| CHECKED: | DATE: |
| SCALE: 2:1 | SHEET 1 OF 1 |
| | |

ISSUE DRAWING NUMBER: J2L Assembly PART NUMBER: J2L018891P00131