




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
ORIGINAL

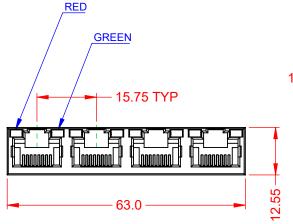



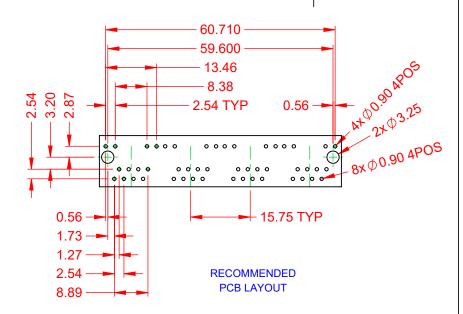

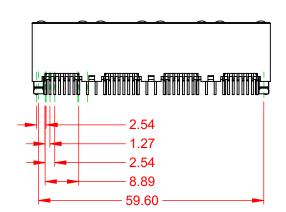

NOTES:

1. MATERIALS:

INSULATOR: NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE,

SELECT GOLD FLASH PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

VOLTAGE RATING:
 CURRENT RATING:
 AMPS @25°C
 CONTACT RESISTANCE:
 20mΩ MAX

5. INSULATOR RESISTANCE: 1000MΩ MIN @ 500V DC

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN
7. MATING/UNMATING FORCE: 30N/3.06KG MAX
8. RETENTION STRENGTH: 50N MIN FOR 60s ±5s

9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ACAD REFERENCE NO.: J2W Assembly RJ45, VERTICAL PCB MOUNT, 4 PORTS DRAWN: Y.Z DATE: November 25, 2019 CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS SCALE: 2:1 SHEET OF 1 **EDAC INC** ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED J2W Assembly ISSUE DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: J2W048821N21031 WITHOUT WRITTEN PERMISSION.



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.