

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
ORIGINAL

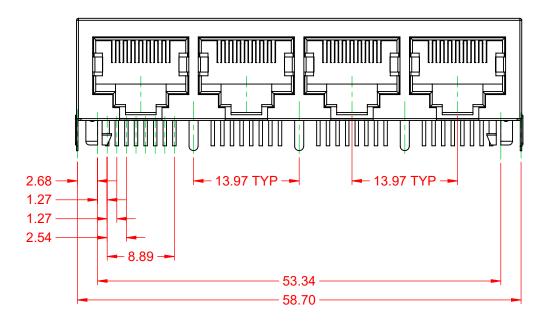



## 58.90

## NOTES:

1. MATERIALS:

INSULATOR: PBT, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE,

SELECT 30µ" GOLD PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

VOLTAGE RATING:
 CURRENT RATING:
 AMPS @25°C
 CONTACT RESISTANCE:
 20mΩ MAX

5. INSULATOR RESISTANCE: 1000 MΩ MIN @ 500V DC

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

1500VDC CONTACT TO SCREEN AND TEST PANEL

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN
7. MATING/UNMATING FORCE: 30N/3.06KG MAX
8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s
9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.




TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

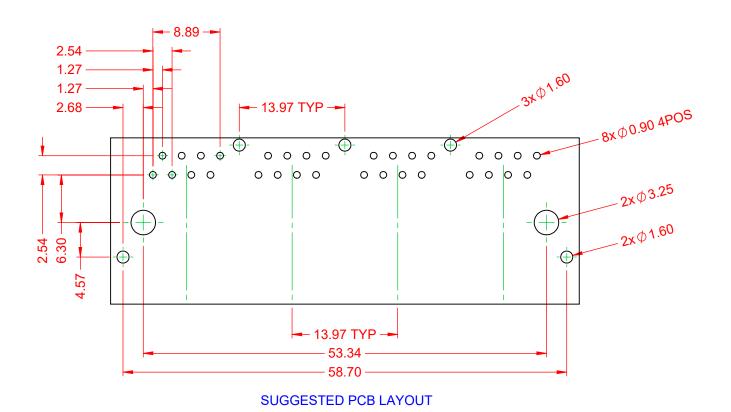

RJ45, 4 PORTS, RIGHT ANGLE PCB MOUNT

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: J93 Assembly		
DRAWN: C.B	DATE: January 16	, 2020
CHECKED:	DATE:	
SCALE: 2:1	SHEET 2 OF	2
DDAMINO NUMBER 102 Assembly		100115

DRAWING NUMBER: J93 Assembly ISSUE PART NUMBER: J93048862P00101