

YOUR CONNECTION TO QUALITY & SERVICE


WITHOUT WRITTEN PERMISSION.

2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

DRAWING NUMBER: J96 Assembly MANUFACTURE OR SALE OF APPARATUS PART NUMBER: J96028822N23221

1

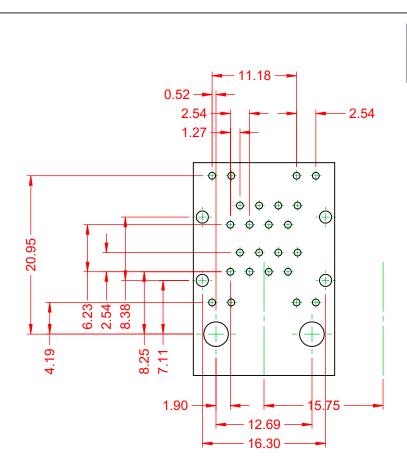

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

.X ±0.25 .XX ±0.13

.XXX ±0.05





ORIGINAL

(1)

## NOTES:

## 1. MATERIALS: **INSULATOR:**

CONTACT:

2. VOLTAGE RATING:

- 3. CURRENT RATING:
- 4. CONTACT RESISTANCE:

NYLON, BLACK, UL 94V-0 PHOSPHOR BRONZE, SELECT GOLD FLASH PLATING ON CONTACT AREA TIN ON TAILS OVER NICKEL 125 VAC RMS 1.5 AMPS @25°C  $20m\Omega MAX$ 

5. DIELECTRIC WITHSTANDING:	1000V AC CONTACT TO CONTACT OR
	1500VDC CONTACT TO SCREEN AND TEST PANEL
	@0.5mA 50Hz OR 60Hz 60s
6. DURABILITY:	750 CYCLES MIN
7. MATING/UNMATING FORCE:	30N/3.06KG MAX
8. RETENTION STRENGTH:	30N MIN FOR 60s ±5s
9. OPERATING TEMP:	-40 °C TO +85 °C
10. STORAGE TEMP:	-40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

		ACAD REFERENCE NO.: J96 Assembly		
RJ45, 2 PORTS, RIGHT AN	DRAWN: C.B	DATE: January 20	), 2020	
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: 2:1	SHEET 2 OF	2
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: J96 Assembly		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: J96	028822N23221	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

ACAD REFERENCE NO.: J96 Assembly								
DRAWN: C.B	DATE: January 20, 202	January 20, 2020						
CHECKED:	DATE:							
SCALE: 2:1	SHEET 2 OF 2							
DRAWING NUMBER: J96 Asse	mbly ISS	UE						
PART NUMBER: J9602882	2N23221 <sup>1</sup>							
	•							