


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

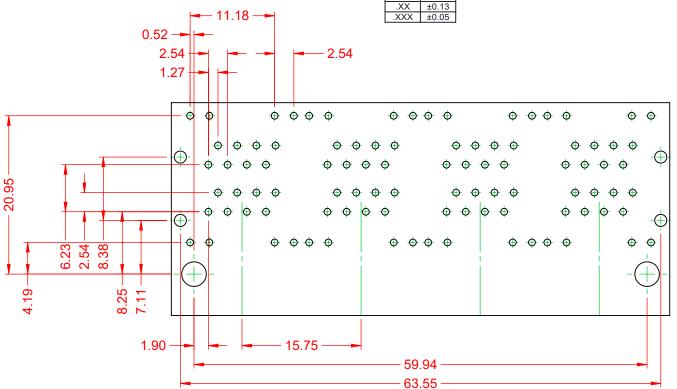

## NOTES:

1. MATERIALS:

**INSULATOR:** NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE,

SELECT 50µ" GOLD PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

2. VOLTAGE RATING: 125 VAC RMS 1.5 AMPS @25°C 3. CURRENT RATING: 4. CONTACT RESISTANCE: 20mΩ MAX

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

1500VDC CONTACT TO SCREEN AND TEST PANEL

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN 7. MATING/UNMATING FORCE: 30N/3.06KG MAX 8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

YOUR CONNECTION TO QUALITY & SERVICE

**EDAC INC** TORONTO, ONTARIO CANADA

RJ45, 8 PORTS, RIGHT ANGLE PCB MOUNT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| ACAD REFERENCE NO.: J96 Assembly |                  |        |
|----------------------------------|------------------|--------|
| DRAWN: C.B                       | DATE: January 20 | , 2020 |
| CHECKED:                         | DATE:            |        |
| SCALE: 2:1                       | SHEET 2 OF       | 2      |
| DRAWING NUMBER: 106 Assembly     |                  | ICCLIE |

DRAWING NUMBER: J96 Assembly ISSUE PART NUMBER: J96088892N28221

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.