




Din Header Connectors

EDAC DIN connectors are fully compliant with 41612 standards. High density metal to metal connections provide a high continuity interconnect solution in backplanes. Contacts can be fully loaded or selectively loaded to protect against cross talk in high speed applications.


Features

- From 5 to 96 contacts available in three rows
- Plating options from flash to 30u" gold
- Solder tail, wire wrap and press fit terminations
- Mounting options include through hole or boardlocks
- Wide operating temp range of -55° C to +105° C

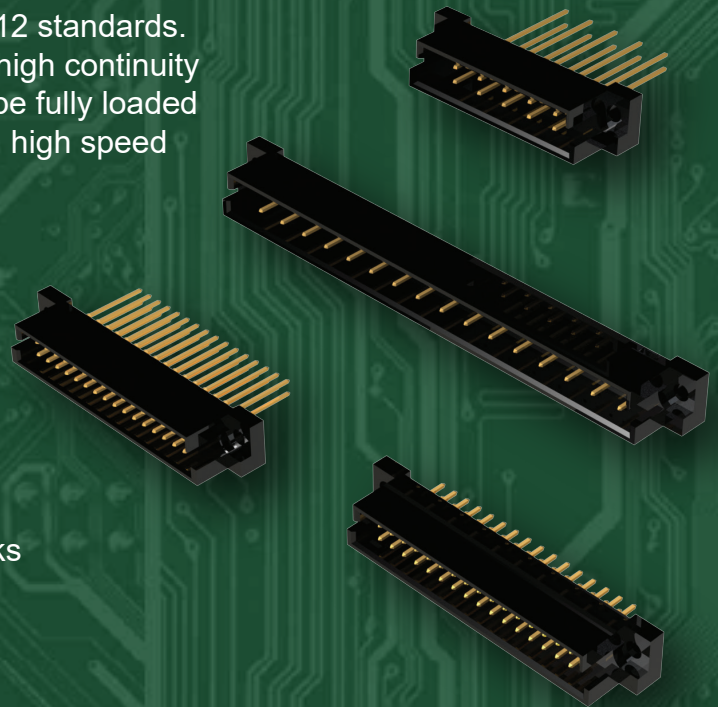

EDAC

www.edac.net



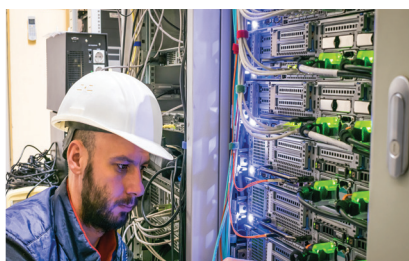


Din Header Connectors

Series	No. of Contacts	Plating	Contact Options	Contact Row Arrangements	Contact Spacing Arrangements
461	5-64	Flash-30u" gold	8	2	2
462	5-64	Flash-30u" gold	1	2	2
463	8-64	Flash-30u" gold	1	2	2
464	8-64	Flash-30u" gold	2	2	2
493	5-96	Flash-30u" gold	8	3	2
494	8-96	Flash-30u" gold	1	3	2
495	8-96	Flash-30u" gold	1	4	2
496	8-96	Flash-30u" gold	8	3	2

Rugged Board to Board Connections

Hi Reliability
Backplane
Interconnect solution



EDAC

For More Information
www.edac.net

