




耐高温卡槽连接器

EDAC的耐高温卡槽连接器采用了对于RoHS红外焊接工艺而言最理想的高温绝缘体。此加强型卡槽连接器兼具标准卡槽连接器所有的特点，工作温度范围可覆盖-40° C 到 +125° C。

特点

- 单排或双排6P-88P
- 额定电流：5A
- 多样的安装选择
- 标准PC插板式、90度弯插和绕线式尾针类型
- 耐高温材料

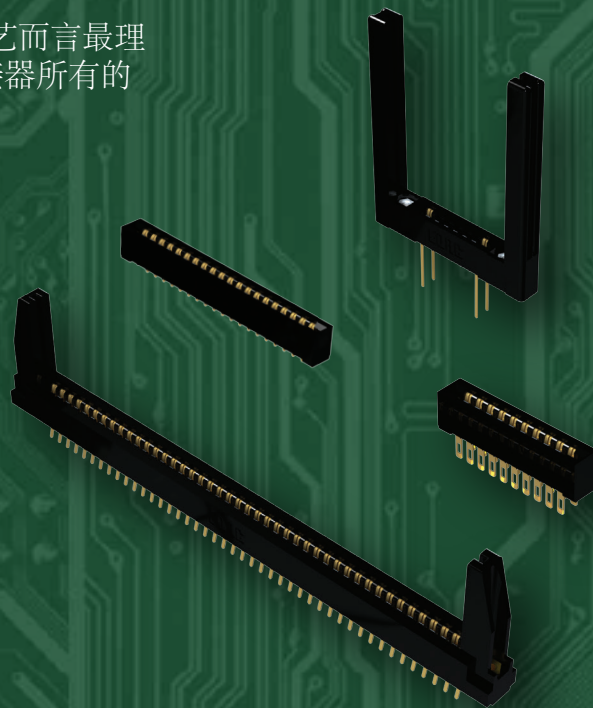

EDAC

www.edac.net






耐高温卡槽连接器

系列	触点间距	行距	触点数	高温绝缘	触点选项	安装选项	极化
DAP							
807	0.156" (3.96mm)	0.200 (5.08mm)	06-88	是	25	7	是
833	0.156" (3.96mm)	0.200 (5.08mm)	06-86	是	14	7	是
837	0.156" (3.96mm)	0.200 (5.08mm)	06-86	是	14	7	是
842	0.100" (2.54mm)	0.200 (5.08mm)	05-116	是	14	7	是
845	0.100" (2.54mm)	0.250 (6.35mm)	05-144	是	14	7	是
846	0.125" (3.17mm)	0.200 (5.08mm)	05-100	是	12	10	是
PPS							
857	0.156" (3.96mm)	0.200 (5.08mm)	06-88	是	25	7	是
887	0.156" (3.96mm)	0.200 (5.08mm)	06-86	是	14	7	是
892	0.100" (2.54mm)	0.200 (5.08mm)	05-116	是	14	7	是
895	0.100" (2.54mm)	0.200 (5.08mm)	05-144	是	14	7	是
896	0.125" (3.17mm)	0.250 (6.35mm)	05-100	是	12	10	是



用于Rohs工艺的高温绝缘体!

优越的板对板配对方案...



EDAC

获取更多信息
www.edac.net

