




# Waterproof D-Sub Connectors

The EDAC D-Seal series of IP67 rated waterproof D-Subminiature connectors are available in both standard and high density packages. Plug & receptacles in 9, 15, 25, 26 and 44 pin versions are available as well as high power combo configurations. Vertical and right angle footprints, with a variety of termination styles, contact plating thicknesses, and mounting options are available. A solid performer in ruggedized applications and harsh environments.


## Features

- Standard and high density plug and receptacles in 9, 15, 25, 26 and 44 contact pin sizes
- Signal along with high power contacts up to 40 amps combined in one connector
- Plug shell indents provide grounding and additional mating retention
- Mounting options for panel mount or connector mating include threaded inserts and threaded standoffs
- Epoxy sealed by special process providing zero ingress, no wicking up leads and a smooth molded finish with no air bubbles. Combined with solid O-ring seal to panel
- Degree of Protection: IP67 as per IEC60529

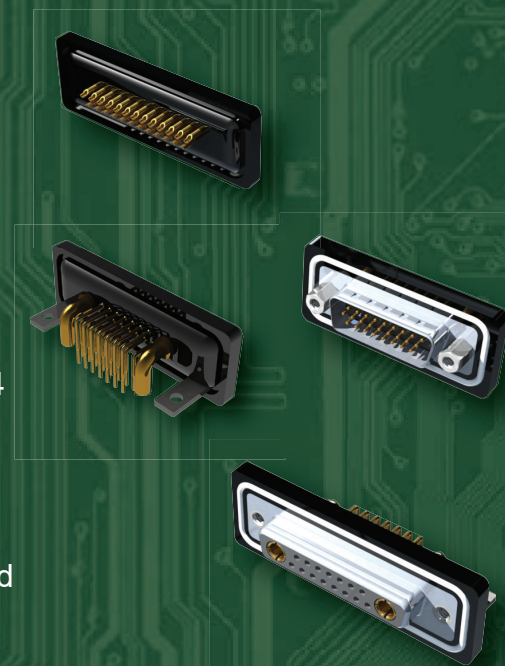

# EDAC

[www.edac.net](http://www.edac.net)

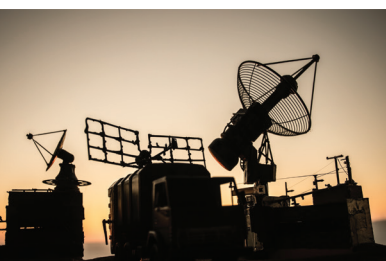



## Waterproof D-Sub Connectors

Series M/F	No. of Contacts	Plating Options	No. of Contact Codes & Density	Ins. Color Options	Shell Plating Options	Flange Mtg. Options
627W/628W	9-25	Flash- 30u" gold	4 Std.	1	1	3
629W/630W	9-25	Flash- 30u" gold	4 Std	1	1	3
633W/634W	15-44	Flash- 30u" gold	3 High	1	1	1
637W/638W	15-44	Flash-	3 High	1	1	1

Widest range of options available to meet all design requirements

Superior IP67 Waterproof solution that withstands harsh environments

## Waterproof Power Combo D-Sub Connectors

Series M/F	No. of Contacts Power / Signal	Plating Options	No. of Contact Codes & Density	Ins. Color Options	Shell Plating Options	Flange Mtg. Options
627WC/628WC	1-5 / 0-20	Flash- 30u" gold	12 Std.	1	2	4
629WC/630WC	1-5 / 0-20	Flash- 30u" gold	12 Std.	1	2	6

