




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.20
.XXX	±0.15



THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER

ORIGINAL	①
ADD SOLDERING TEMP AND WAVE SOLDER FLOW IN NOTES Y.ZHANG OCT.22/2018	②
ADD TABLE P.M. FEB. 25/2021	③
REMOVE TABLE P.M. MAR. 01/2021	④

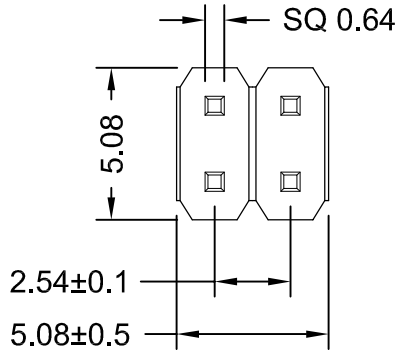

RECOMMENDED P.C.B. HOLE LAYOUT (TOP SIDE)
PCB BOARD TOLERANCE ±0.05

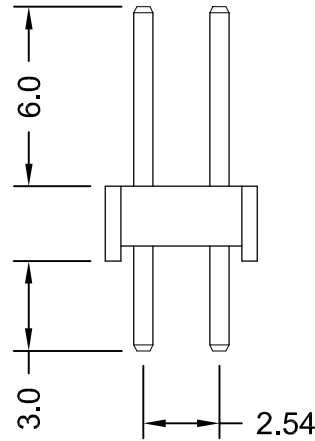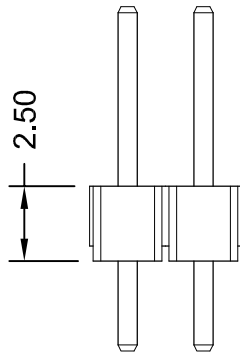

NOTES:

- | | |
|-------------------------------------|---------------------------------------|
| 1. MATERIALS: | |
| INSULATOR: | PBT, UL94V-0 COLOR BLACK |
| CONTACT: | COPPER ALLOY, TIN PLATING OVER NICKEL |
| 2. CURRENT RATING: | 3A AC/DC |
| 3. CONTACT RESISTANCE: | 20 mΩ MAX. |
| 4. DIELECTRIC WITHSTANDING: | 1000V AC/60s |
| 5. INSULATOR RESISTANCE: | 1000 MΩ min. |
| 6. OPERATING TEMPERATURE: | -40°C TO +105°C |
| 7. HAND SOLDERING IRON TEMPERATURE: | : 320°C FOR 2s |
| 8. WAVE SOLDER FLOW (DIP TIME): | 235°C FOR 3~5s |

PIN HEADER, 2.54 PITCH, DUAL ROW 4 PIN, DIP STRAIGHT

ACAD REFERENCE NO.: 151-604-425-761

DRAWN: C.B DATE: SEP. 18/2017

CHECKED: R.S.M. DATE: MAR. 01/2021

SCALE: (IN C.A.D. 1:1) SHEET 1 OF 1

DRAWING NUMBER: 151-604-425-761

ISSUE

PART NUMBER: 151-604-425-761

4



EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.