



TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	±0.30
XX	±0.25
XXX	±0.15
0.0°	±0.05°

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
ORIGINAL
15.6 from 15.5 DIM
WILSON T. 06/03/2019
②

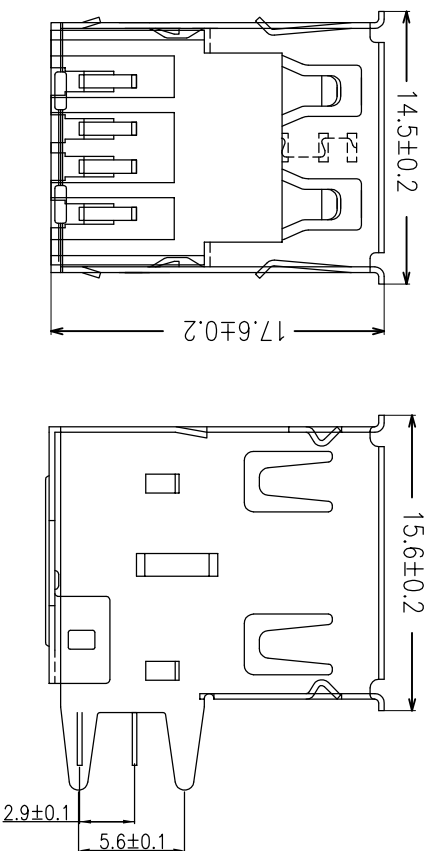

NOTES:

MATERIALS:

CONTACT: PH BR
INSULATOR: PBT + 30% GF (UL94V-0)
SHELL: SPCC

PLATING:



CONTACTS: GOLD AND TIN OVER NICKEL PLATING
SHELL: NICKEL PLATED ALL OVER

MECHANICAL:

MATING: 35 N MAX.
WITHDRAWAL FORCE: 10 N MIN.
DURABILITY: 1500 CYCLES MIN.

ELECTRICAL:

CURRENT RATING: 1.5 A MAX.
CONTACT RESISTANCE: 30mΩ MAX.
WITHSTAND VOLTAGE: 750V AC
INSULATOR RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -55°C ~ 85°C

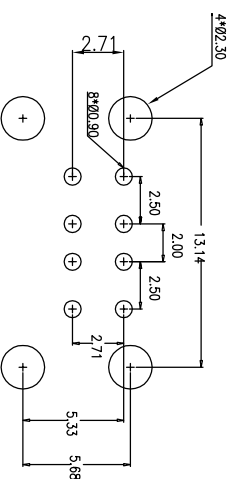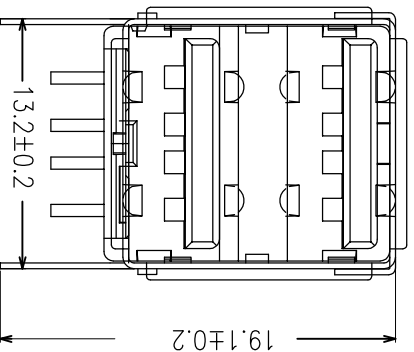

USB TYPE A FEMALE R/A DOUBLE STACK

ACAD REFERENCE NO.: 690-008-221-935

DRAWN: J.T DATE: MAY 30/2017

CHECKED: DATE:

SCALE: (IN C.A.D. 1:1) SHEET 1 OF 1

DRAWING NUMBER: 690-008-221-935 ISSUE

PART NUMBER: 690-008-221-935 1



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR ROHS COMPLIANCY.



EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.