



THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①
ADD HOUSING COLOR Y.ZHANG	SEP.13/2018 ②

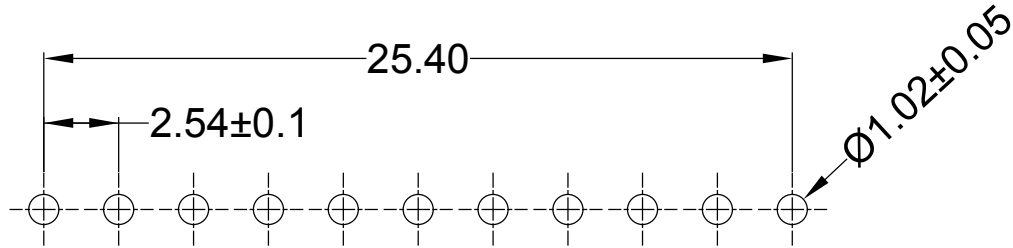

RECOMMENDED P.C.B LAYOUT



TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.30
.XX	±0.20
.XXX	±0.10

NOTES:

MATERIAL:  
HOUSING: PA66, UL94V-0, WHITE COLOR  
CONTACT: BRASS, TIN PLATING ALL OVER NICKEL

OPERATING TEMPERATURE: -25°C ~ +85°C

CURRENT RATING: 4A AC/DC  
VOLTAGE RATING: 250V AC/DC  
CONTACT RESISTANCE: 10mΩ MAX.  
INSULATION RESISTANCE: 1000MΩ min.  
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MINUTE

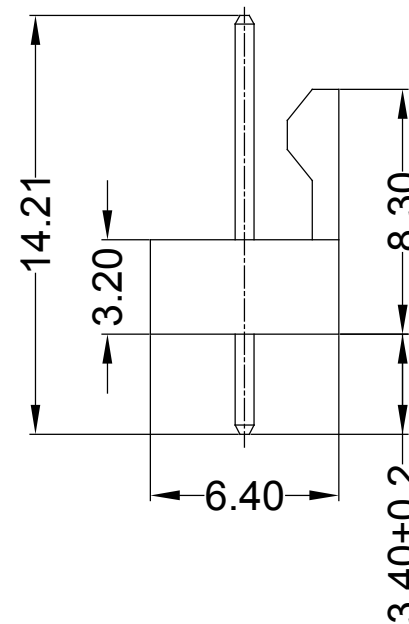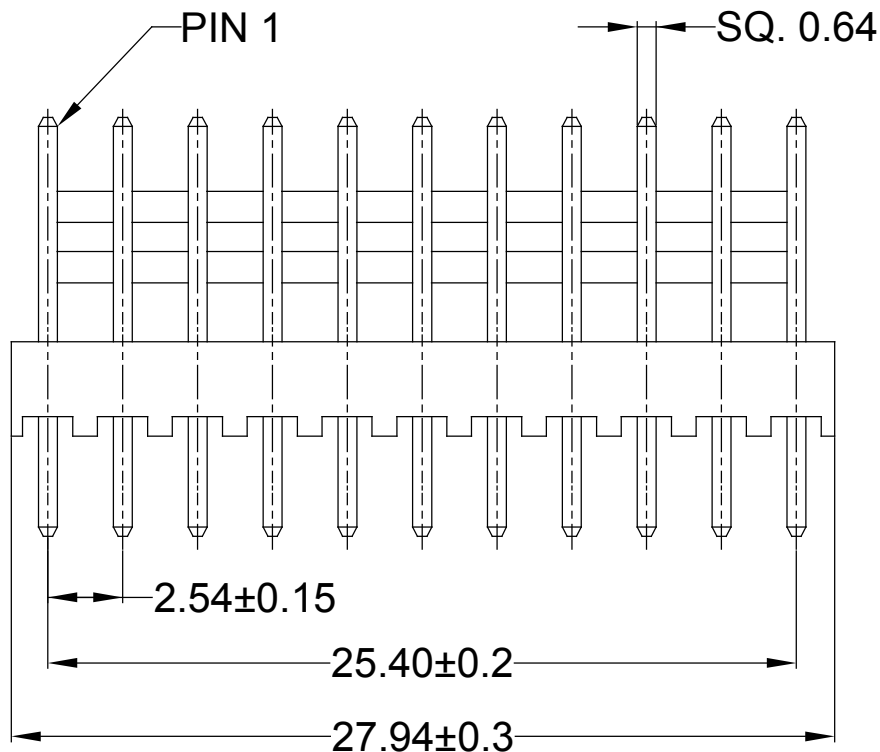

2.54mm PITCH, 11P, WAFER, VERTICAL

ACAD REFERENCE NO.: M00-WF1-025-011	
DRAWN: R.S.M.	DATE: NOV.13/2017
CHECKED:	DATE: NOV.13/2017
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1
DRAWING NUMBER: M00-WF1-025-011	ISSUE 2
PART NUMBER: M00-WF1-025-011	



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC  
TORONTO, ONTARIO  
CANADA

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.