




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



(1)



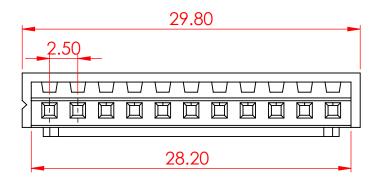



MATERIAL:

USE CONTACT:

COLOR:

250V AC/DC 3A AC/DC 1000V AC/MIN -40° C TO 105° C 1000MΩ MIN.

NYLON66, UL94V-0 NATURAL

14K-292-452 (TIN-PLATED)


MATES WITH HOUSING: 14K-511-210-AA1

MATES WITH PIN HEADER: 14K-511-4XX-AA1 TOP ENTRY CONTACT CODES: 11,12,15 SIDE ENTRY CONTACT CODES: 16,21

MATES WITH SMT:
SMT CONTACT CODES:

14K-511-4XXTAA1 17,18

	14K SERIES 2.50 PITCH SOCKET HOUSING		ACAD REFERENCE NO.: 14K Assembly		UNIT: MM
			DRAWN: V.K.	DATE: 02/07/24	
			CHECKED: R.S.M	DATE: 02/21/24	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: 3:1	SHEET 1 OF	1
	TORONTO, ONTARIO CANADA	CANADA OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 14K-511-210-AA2		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 14K-511	-210-AA2	1

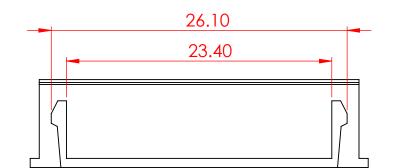



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.