

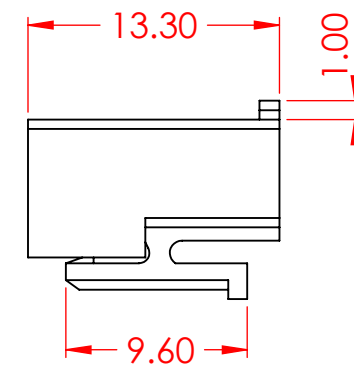


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.3
.XX	±0.2
.XXX	±0.1

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

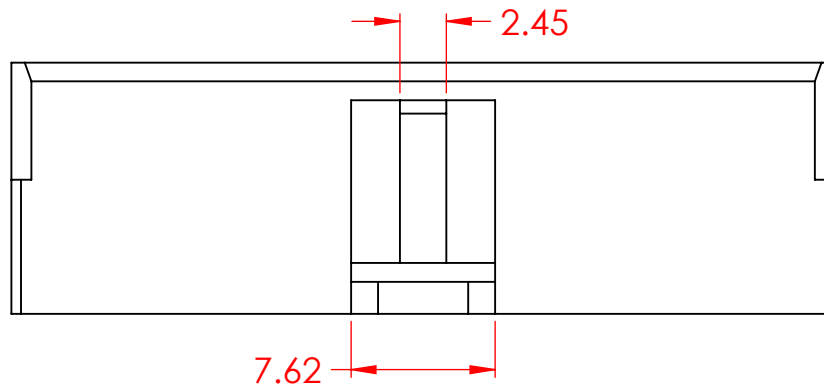

ISSUE NUMBER	
ORIGINAL	①
TEMP RANGE UPDATED V.K. APR. 10/2024	②

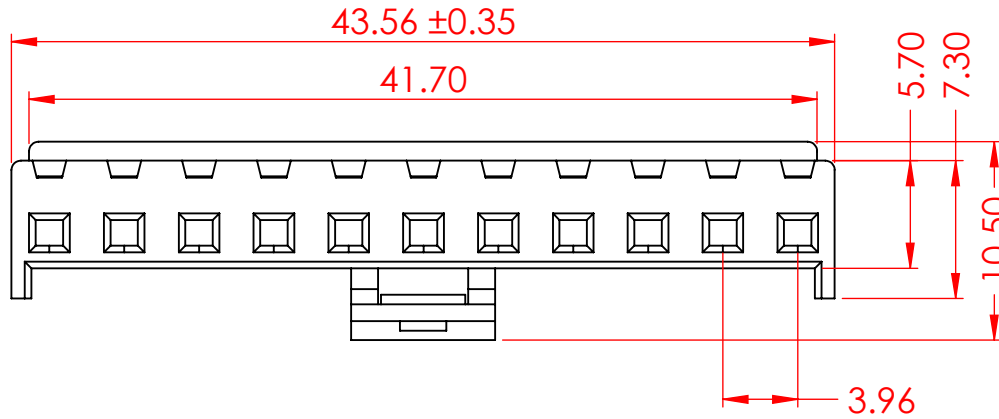

#### SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
CURRENT RATING: 7A AC/DC  
WITHSTANDING VOLTAGE: 1500V AC/MIN  
TEMPERATURE RANGE: -25°C TO 105°C  
INSULATION RESISTANCE: ≥ 1000MΩ  
CONTACT RESISTANCE: ≤ 10mΩ

MATERIAL: NYLON 66, UL94V-0  
COLOR: NATURAL

USE CONTACT: 14L-292-482 (TIN PLATED)  
MATES WITH PIN HEADER  
TOP ENTRY - 14L-611-415-AA1  
SIDE ENTRY - 14L-611-416-AA1

USE CONTACT: 14L-292-282 (GOLD FLASH)  
MATES WITH PIN HEADER  
TOP ENTRY - 14L-611-215-AA1  
SIDE ENTRY - 14L-611-216-AA1



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC  
TORONTO, ONTARIO  
CANADA

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

#### 14L SERIES 3.96MM PITCH SINGLE ROW HOUSING

ACAD REFERENCE NO.: 14L Assembly	UNIT: MM
DRAWN: V.K.	DATE: 11/16/23
CHECKED: R.S.M	DATE: 11/21/23
SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 14L-611-210-AA2	ISSUE
PART NUMBER: 14L-611-210-AA2	2