



THIS IS A C.A.D. GENERATED DRAWING




ISSUE NUMBER **ORIGINAL**

REMOVE CODE 99

J.L. MAR.22/2024

DO NOT MAKE MANUAL REVISIONS TO MASTER. 10-30 ±0.30 30-100 ±0.40



SPECIFICATIONS:

GLASS REINFORCED MATERIAL: THERMOPLASTIC, PA66

CONTACT: **COPPER ALLOY**

PLATING: 30µ" GOLD PLATING ON CONTACT

> AREA, TIN PLATING ON **SOLDERING AREA**

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 1A

DIELECTRIC

WITHSTANDING VOLTAGE: 500VAC RMS 60Hz FOR 60s

INSULATION RESISTANCE: 1000 MEGA OHMS MIN AT 500VDC


CONTACT RESISTANCE: 30 mOHMS MAX

MECHANICAL

RETENTION FORCE: 460g MIN PER CONTACT 230g MAX PER CONTACT PAIR **INSERTION FORCE:** WITHDRAWAL FORCE: 15g MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +85°C

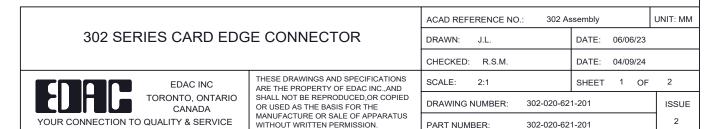





ISSUE NUMBER SEE PAGE 1

A I	

	DIMENSION A			
NO. OF POS.	CONTACT CODE 21	CONTACT CODE 58		
04	1.3	27		
06	2.	54		
08	3.8			
10	5.0	28		
12	6.3	35		
14	7.	62		
16	8.89			
20	11.43			
22	12.70			
24	13.97			
26	15.24			
30	17.78			
32	19.05			
36	21.59			
40	24.13			
48	29.21			
50	30.48			
52	31.75			
60	36.83			
68	41.91	NA		
70	43.18	NA		
80	49.53			
100	62.23	NA		
110	68.58	NA		
120	74.93 NA			
124	77.47 NA			





302-020-621-201 MOUNTING CODE **CONTACT CODE**

NA = NOT AVAILABLE



302 SERIES	CARD F	-DGF	CONNECTOR
002 011110			



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 302 A	NO.: 302 Assembly			UNIT: MM
DRAWN: J.L.	DATE:	06/06/	23	
CHECKED: R.S.M.	DATE:	04/11/	24	
SCALE: N.T.S	SHEET	2	OF	2
DRAWING NUMBER: 302-020-6	521-201			ISSUE

2 PART NUMBER: 302-020-621-201