


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	
ORIGINAL	①
ADD DAUGHTER BOARD RECOMMENDATION	②
R.STA.MONICA	AUG.11/2015

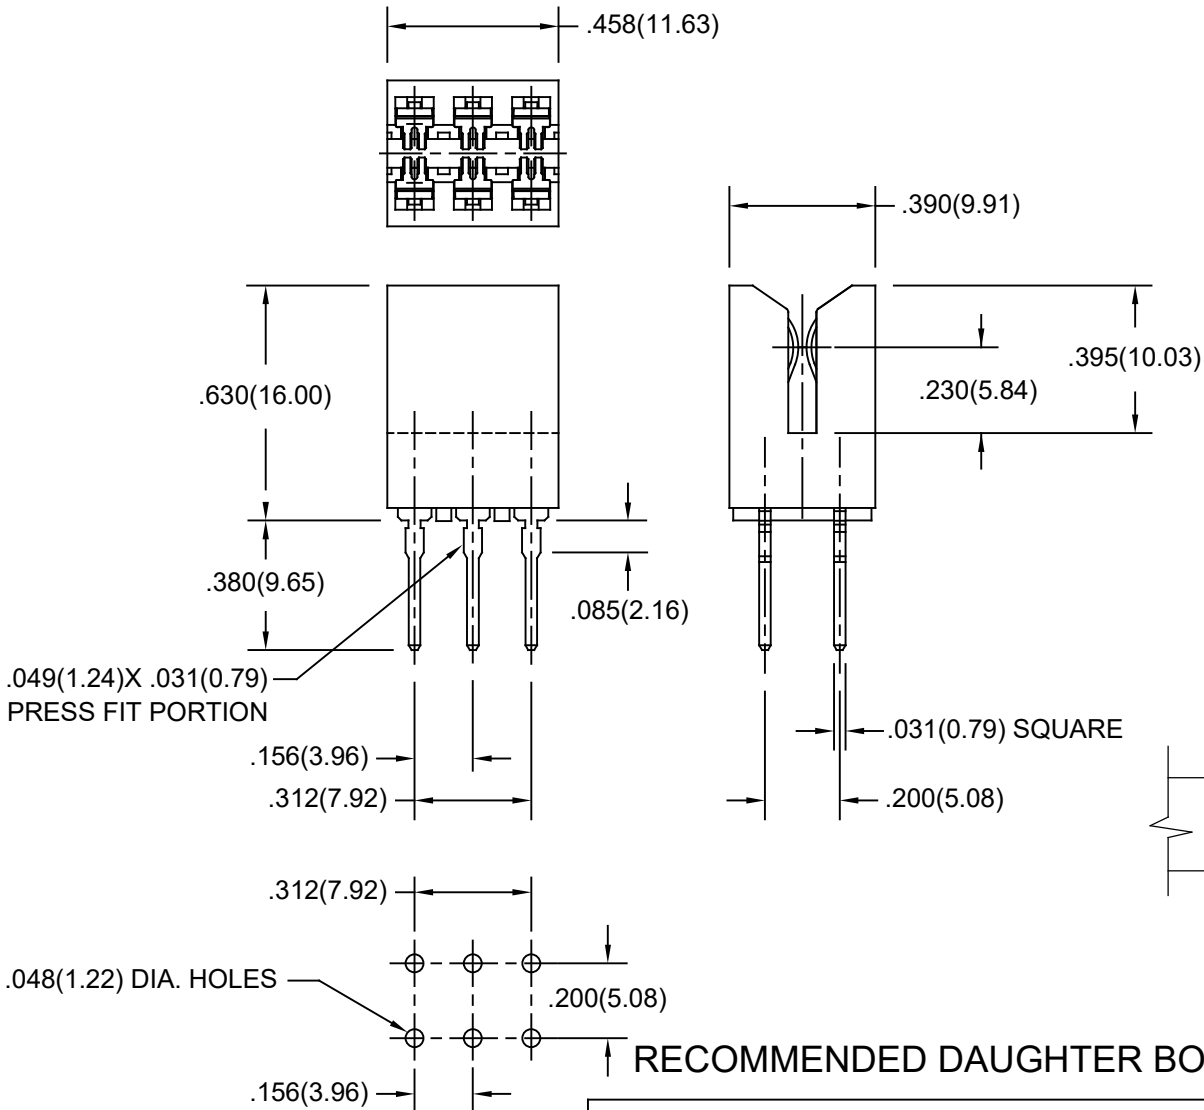

SPECIFICATIONS:

- 1- CONTACT MATERIAL: PHOSPHOR BRONZE
- 2- INSULATOR MATERIAL: GREEN DIALLYL PHTHALATE, UL 94V-0
- 3- CONTACT PLATING: GOLD OVER NICKEL ALL OVER
- 4- CURRENT RATING: 5 AMPERES.
- 5- CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.
- 5- INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM.
- 6- DIELECTRIC WITHSTANDING VOLTAGE: 1800 VAC RMS AT SEE LEVEL.
- 7- INSERTION AND WITHDRAWAL FORCES: 16oz AND 1oz RESPECTIVELY PER CONTACT PAIR
- 8- OPERATING TEMPERATURE: -65°C TO +125°C

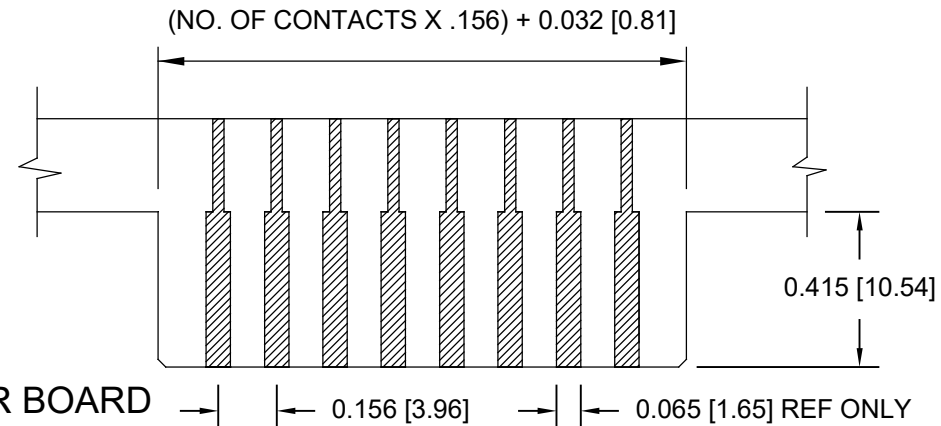

↑ RECOMMENDED DAUGHTER BOARD

**368 SERIES CARD EDGE R/ANGLE CONNECTOR
.156(3.96) CONTACT SPACING (CENTER MODULE)**

REF. 368-006-520-201

DRAWN: F.BRIONES

DATE: JUL. 21/10

PART NUMBER

368-006-520-201

DRAWING NUMBER

368-006-520-201

ISSUE

2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.