
<u>Contact Dimensions:</u>
520-P.C. Tail .030x.018(0.76x0.46) - Tail LG=.175(4.45)
.100 (2.54) Contact Spacing x .200 (5.08) Row Spacing

160 [4.06] POINT OF CONTACT

330[8.38] CARD SLOT

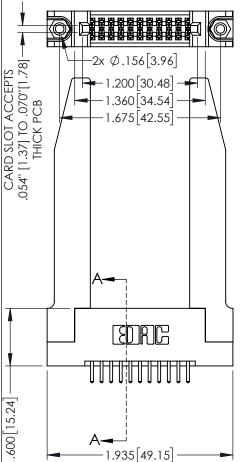

YOUR CONNECTION TO QUALITY & SERVICE

	CHECKED:		DATE:		
	SCALE:	1:1	SHEET	1	OF 2
0	DRAWING		Τ	ISSUE	
	345-ENG-MASTER				1

DRAWN: R.STA.MONICA

ACAD REFERENCE NO. 345-ENG-MASTER

DATE:MAY.16/2017

SECTION A-A


.175 4.45


INSULATOR MATERIAL: THERMOPLASTIC PBT BLACK, UL 94V-0 CONTACT MATERIAL; COPPER TIN ALLOY


CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE


CARD SLOT ACCEPTS .054" [1.37] TO .070" [1.78] —	2x Ø.156[3.96] -1.200[30.48] -1.360[34.54] -1.675[42.55]
Ĭ.	

345/395 SERIES CARD EDGE CONNECTOR PART NUMBER: 395-022-520-278

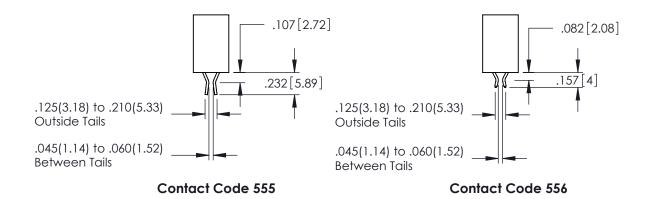







Contact Code 558

Contact Code 559

Contact Code 560

INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0

DAP MATERIAL AVAILABLE UPON REQUEST

CONTACT MATERIAL; COPPER ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

345/395 SERIES CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 345-ENG-MASTER DATE:MAY.16/2017 DRAWN: R.STA.MONICA 1:1 SHEET 2 OF 2

345-ENG-MASTER