


- Features:**
- High density 96 Contact 3 Row Metal-to-Metal Connector on 2.54mm (.100") Grid
  - Contact Material and Finish: Brass with selective gold plating: 2- Gold Flash Plating  
3- 15u" of Gold Plating  
6- 30u" of Gold Plating
  - Contact Tails: 0.6 x 0.5mm (.024" x .020")
  - Contact Spacing: 2.54 x 2.54mm (.100" x .100") single, double or triple rows; or 2.54 x 5.08mm (.100" x .200") single, double or triple rows.
  - Available in: 5, 8, 10, 15, 16, 20, 24, 30, 32, 48, 64, and 96 positions
  - Connectors designed to meet DIN 41612-R (Male) specifications


THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①

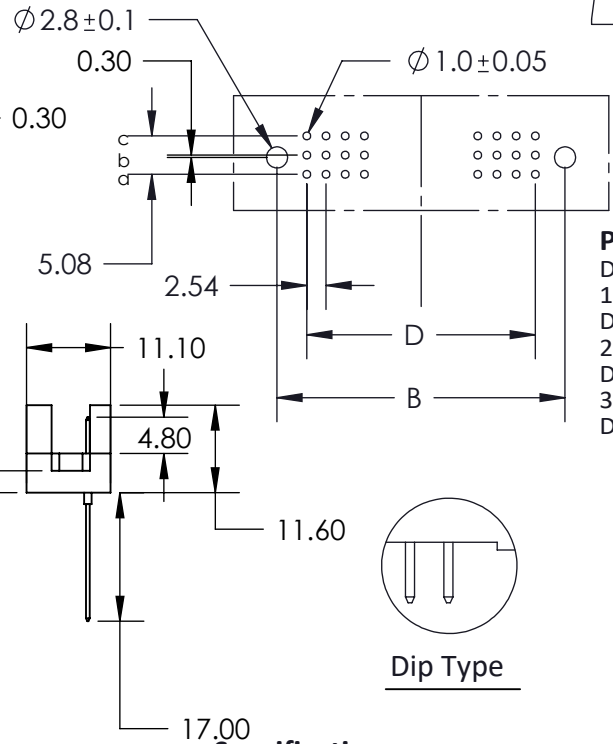

**P.C. BOARD PATTERN**  
Dimension D at 2.54 Pitch:  
1 Row:  
D = No. of Positions-1 X 2.54  
2 Rows:  
D = (No. of Positions/2)-1 X 2.54  
3 Rows:  
D = (No. of Positions/3)-1 X 2.54



- Specifications:**
- Current Rating: 2 Amperes @ 20°C
  - Contact Material: Brass
  - Contact Plating: Selective Gold Plating
  - Contact Resistance: 30 milliohms, maximum
  - Insulator Material: 30% Glass Filled PBT, UL 94V-0
  - Insulation Resistance: Mated - 1000 Mega (10<sup>6</sup>) ohms
  - Dielectric Withstanding Voltage: 1000 V.A.C RMS
  - Basic Grid: 2.54mm (.100")
  - Operating Temperature: -55°C to +105°C

493 Series Metal-To-Metal DIN Connector  
PART NUMBER: 493-132-381-111

ACAD REFERENCE NO.	493 -ENG-MASTER
DRAWN:R.STA.MONICA	DATE: JUL.20/10
CHECKED:	DATE:
SCALE: NTS	SHEET 1 OF 1
DRAWING NUMBER 493 -ENG-MASTER	ISSUE 1

**EDAC INC**  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC. AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

**RoHS COMPLIANT**  
THIS SERIES FULLY CONFORMS TO THE  
EUROPEAN UNION DIRECTIVES 2002/95/EC  
AND 2002/96/EC FOR RoHS COMPLIANCY