


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX

±0.13 .XXX ±0.10

NOTES:

MATERIAL: **HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

PART NUMBER:

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING


OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

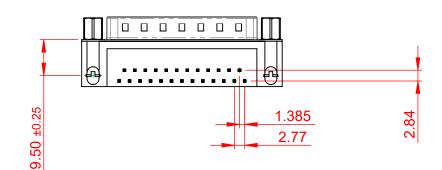

621 SERIES D-SUB CONNECTOR



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 621 ASSEMBLY			
	DRAWN: C.B	DATE: AUG. 01/2018		
	CHECKED:	DATE:		
	SCALE: 1:1	SHEET 1 OF 1		
	DRAWING NUMBER: 621-025-668-546			

621-025-668-546



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.