


TOLERANCE UNLESS OTHERWISE SPECIFIED		THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.	
.X	±0.25		


.XX


±0.13 .XXX ±0.10



ISSUE NUMBER ORIGINAL





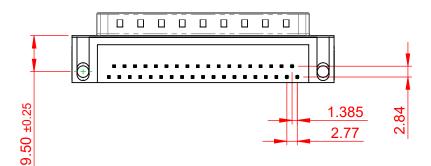

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

621 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 621 A	SSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018	
CHECKED:	DATE:	
SCALE: 1:1	SHEET 1 OF 1	
DDAMING NUMBER: 621 027 269 511		

DRAWING NUMBER: 621-037-368-511 ISSUE PART NUMBER: 621-037-368-511