



.XX


±0.13 .XXX ±0.10



ISSUE NUMBER ORIGINAL





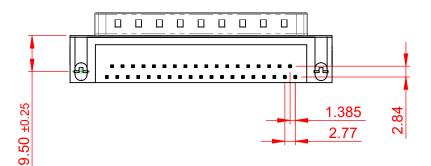

NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:**

PART NUMBER:

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: 25mΩ MAX. $5000M\Omega$ min. **INSULATOR RESISTANCE:**

DIELECTRIC

621 SERIES D-SUB CONNECTOR

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 621 ASSEMBLY DRAWN: DATE: AUG. 01/2018 CHECKED: DATE: OF SCALE: 1:1 SHEET 621-037-668-541 ISSUE DRAWING NUMBER:

621-037-668-541