


.X ±0.25 .XX


±0.13 .XXX ±0.10


IS A C.A.D. GENERATED DRAWING
OT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL





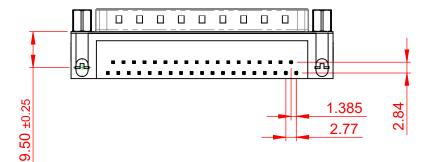

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

25mΩ MAX. **CONTACT RESISTANCE: INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

621 SERIES D-SUB CONNECTOR

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 621 ASSEMBLY		
	DRAWN: C.B	DATE: AUG. 01/2018	
	CHECKED:	DATE:	
	SCALE: 1:1	SHEET 1 OF 1	
	DRAWING NUMBER: 621-037-668-546		

DRAWING NUMBER: 021-037-008-340 PART NUMBER: 621-037-668-546