


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL





TOLERANCE

UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX

±0.13 .XXX ±0.10



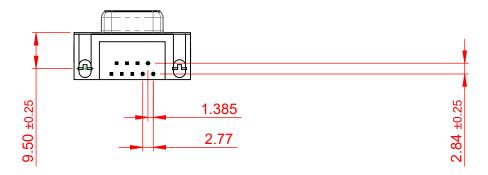

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

SW REFERENCE NO.:

PART NUMBER:

622 ASSEMBLY

622-009-368-541

OF

1

ISSUE

OPERATING TEMPERATURE: -55°C TO +125°C

3A PER CONTACT CURRENT RATING:

CONTACT RESISTANCE: 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

MANUFACTURE OR SALE OF APPARATUS

WITHOUT WRITTEN PERMISSION.

WITHSTANDING VOLTAGE: 1000V AC rms

622 SERIES D-SUB CONNECTOR DRAWN: DATE: AUG. 01/2018 CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS SCALE: (IN C.A.D. 1:1) SHEET THIS SERIES FULLY CONFORMS TO EDAC INC ARE THE PROPERTY OF EDAC INC..AND THE EUROPEAN UNION DIRECTIVES TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 622-009-368-541 DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA

YOUR CONNECTION TO QUALITY & SERVICE



2011/65/EU FOR RoHS COMPLIANCY.

10°