





ISSUE NUMBER ORIGINAL

 3.18 ± 0.38 5.8 9 9.50 ±0.25

.X ±0.25 .XX ±0.13



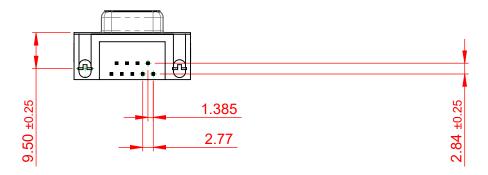

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

622 SERIES D-SUB CONNECTOR



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| | SW REFERENCE NO.: 622 ASSEMBLY | |
|--|---------------------------------|--------------------|
| | DRAWN: C.B | DATE: AUG. 01/2018 |
| | CHECKED: | DATE: |
| | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF 1 |
| | DRAWING NUMBER: 622-009-668-541 | |

DRAWING NUMBER: 022-009-008-541 PART NUMBER: 622-009-668-541



10°

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.