


OPERATING TEMPERATURE: -55°C TO +125°C

**CURRENT RATING:** 3A CONTACT RESISTANCE: 25 **INSULATOR RESISTANCE:** 50 DIELECTRIC

| A PER CONTACT |  |
|---------------|--|
| 5mΩ MAX.      |  |
| 000MΩ min.    |  |
|               |  |

WITHSTANDING VOLTAGE: 1000V AC rms

|   |                    |   | SW REFERENCE NO.: 622 ASSEMBLY  |            |       |  |
|---|--------------------|---|---------------------------------|------------|-------|--|
|   | 622 SERIES D-SUB ( | DRAWN: C.B  | DATE: AUG. 01/20                | )18        |       |  |
|   |                    |   | CHECKED:                        | DATE:      |       |  |
|   | EDAC INC           | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INC.,AND  | SCALE: (IN C.A.D. 1:1)          | SHEET 1 OF | 1     |  |
| Y |                    | SHALL NOT BE REPRODUCED, OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 622-037-668-532 |            | ISSUE |  |
|   |                    |   | PART NUMBER: 622-037-0          | 368-532    | 1     |  |

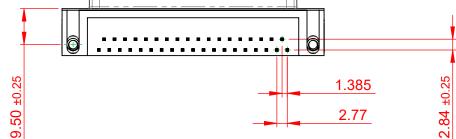



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.