


TOLERANCE UNLESS OTHERWISE SPECIFIED		THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.	
.X	±0.25		
.XX	±0.13		


.XXX ±0.10



ISSUE NUMBER ORIGINAL





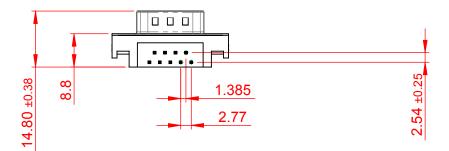

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, Sn or Ni PLATED

CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING


OPERATING TEMPERATURE: -55°C ~ 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 623 A	SSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018	
CHECKED:	DATE:	
SCALE: 1:1	SHEET 1 OF 1	
DDAMING NUMBER: 622 000 261 005		

DRAWING NUMBER: 623-009-261-005 ISSUE PART NUMBER: 623-009-261-005