


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED ORIGINAL DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.10

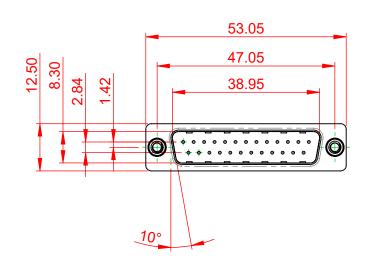



11.0 ±0.30 6.1 5.30 ±0.30



ISSUE NUMBER

(1)

NOTES:


MATERIAL:

HOUSING: GREEN THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED SHELL: CONTACT: COPPER ALLOY, 30µ GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

CURRENT RATING: 5A PER CONTACT CONTACT RESISTANCE: $25m\Omega$ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

627 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 627 ASSEMBLY					
		DRAWN: C.B		DATE: AUG. 01/2018			
			CHECKED:		DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1		SHEET 1	OF	1	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 627-M25-623-GN6			ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER:	627-M25-	623-GN6		1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.