


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.









NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

(IF PRESENT)

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

OPERATING TEMPERATURE:

.X ±0.25 .XX

±0.13 .XXX ±0.05


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE) 10mΩ MAX. 5000MΩ min.

1000V AC rms

-55°C ~ 125°C

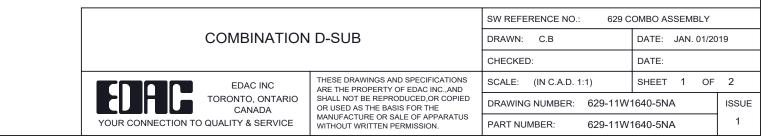





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

