





ISSUE NUMBER	
ORIGINAL	1

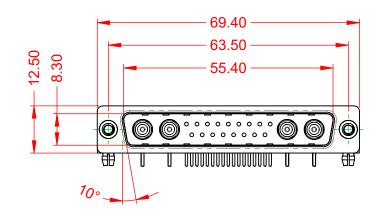




NOTES:

ç

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	50Ω (IMPEDAN
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

NCE)

-55°C ~ 125°C

ГАСТ

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBIN	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19		
			CHECKED:	DATE:			
EDAC INC TORONTO, ONTARIO CANADA		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	ITARIO SI A OI		DRAWING NUMBER: 629-21W	4240-5N3	ISSUE		
YOUR CONNECTION TO QUALITY & SE			PART NUMBER: 629-21W	4240-5N3	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

