



ÅÞ



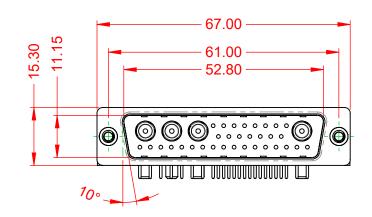




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

WITHSTANDING VOLTAGE:

.XX ±0.13 .XXX ±0.05

1000V AC rms



ſ	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
ļ			DRAWN: C.B	DATE: JAN. 01/201	19
ļ			CHECKED:	DATE:	
ŗ	EDAC INC TORONTO, ONTARIO CANADA VOLID CONNECTION TO CULA USY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ļ			DRAWING NUMBER: 629-36W4240-3NC		ISSUE
ļ			PART NUMBER: 629-36W4	4240-3NC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

