


Ν	0	TE	ΞS	S:	

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING:	30A (CURRENT) 5A PER CONTACT
	10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.
WITHSTANDING VOLTAGE:	1000V AC rms



_____© U-U-U (U-U-U)

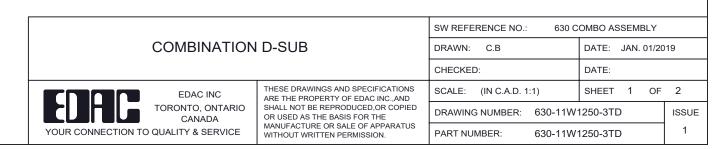

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

