

.XX


±0.13


10.70

5.80

.XXX ±0.05



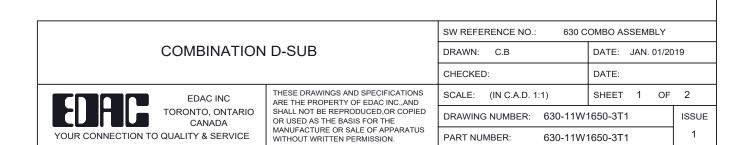



MATERIAL: HOUSING: SHELL: CONTACT:


OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms

5000MΩ min.





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

