



(1)

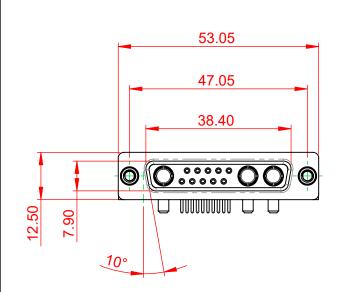



NOTES:


| MATERIAL: HOUSING: SHELL: CONTACT: | THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED |
|---|---|
| OPERATING TEMPERATURE: | -55°C ~ 125°C |
| POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: | 20A (CURRENT) |




INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13

.XXX ±0.05



| | COMBINATION D-SUB | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | |
|--|--|--|--------------------------------------|-------------------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 ⁻ | 19 |
| | | | CHECKED: | DATE: | |
| | EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| | | | DRAWING NUMBER: 630-13W3240-2N6 | | ISSUE |
| | | | PART NUMBER: 630-13W | 3240-2N6 | 1 |





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 5000MΩ min. 1000V AC rms

