



(1)

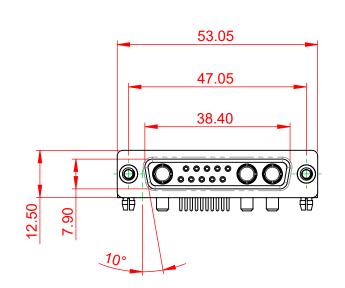



NOTES:


MATERIAL: HOUSING: THE SHELL: STE CONTACT: COF

.XX

±0.13


.XXX ±0.05


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



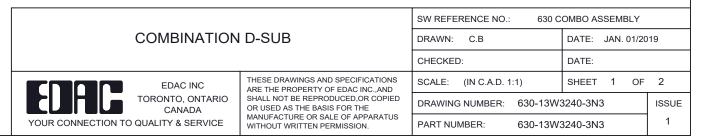

5000MΩ min.

1000V AC rms

COMPLIANT 2

3.20

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

