



(1)

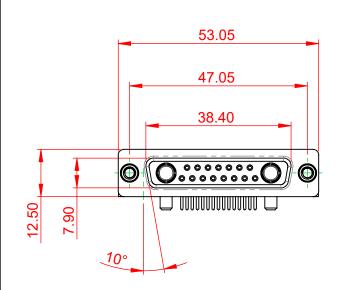




## NOTES:


.XX

±0.13

.XXX ±0.05

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	
INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:	5000MΩ min.

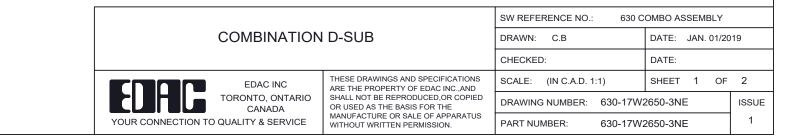





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

