








ISSUE NUMBER ORIGINAL



±0.13



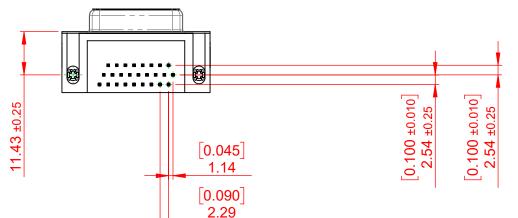

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

STEEL, NICKEL PLATED SHELL:

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE: $25m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

PART NUMBER:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

634 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 634 ASSEMBLY		
DRAWN: C.B	DATE: AUG. 01/20	18
CHECKED:	DATE:	
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	1
DRAWING NUMBER: 634-026-363-545		ISSUE

634-026-363-545