
**TOLERANCE** UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER **ORIGINAL** 

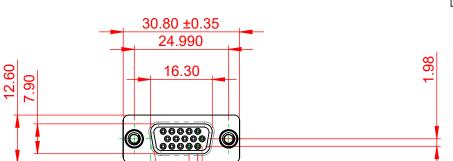


1.143 2.29



10°





NOTES:

MATERIAL:

**HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

COPPER ALLOY, 30µ GOLD PLATED CONTACT:

OPERATING TEMPERATURE: -55°C TO 125°C

**3A PER CONTACT CURRENT RATING:** 

**CONTACT RESISTANCE:**  $25m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

## 638 SERIES D-SUB CONNECTOR



**EDAC INC** TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 628 ASSEMBLY	
	DRAWN: C.B	DATE: AUG. 01/2018
	CHECKED:	DATE:
	SCALE: 1:1	SHEET 1 OF 1
	DDAWING NUMBER: 638 015 632 268	

DRAWING NUMBER: 638-015-632-268 ISSUE PART NUMBER: 638-015-632-268

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.