
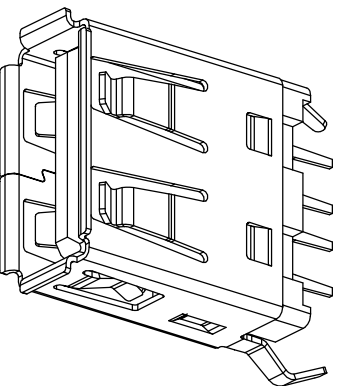
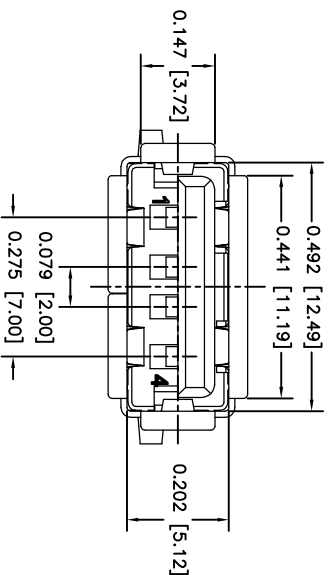
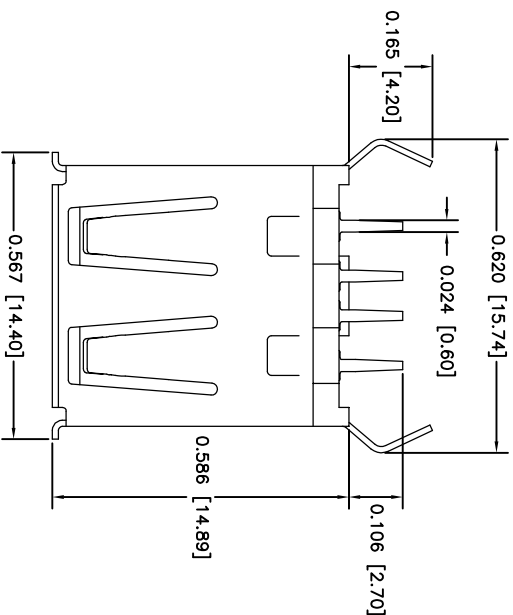


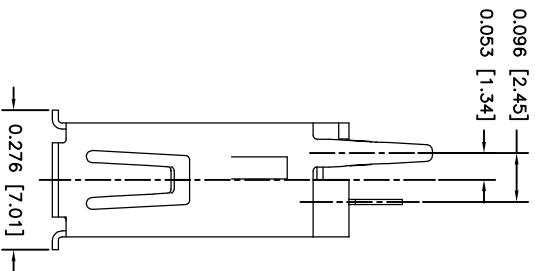

GENERAL TOLERANCES: $\pm 0.010(0.25)$ EXCEPT ON
PCB LAYOUT AND CONTACTS SPACING $\pm 0.006(0.15)$

ELECTRICAL:

RATED CURRENT: 1.5A

RATED VOLTAGE: 30V (rms) MAX

FORCES:

MATING FORCE: 35N MAX

UNMATING FORCE: 10N MIN

MATERIALS:

SHELL: COPPER ALLOY, NICKEL PLATED

CONTACTS: COPPER ALLOY GOLD PLATE ON CONTACT AREA

TIN ON TAIL END


GOLD FLASH

30 MICROINCHES OF GOLD 260 CONTACT CODE

INSULATOR: THERMOPLASTIC (HIGH TEMPERATURE RESISTANCE)

PART NUMBER: 690-004-260-013

CONTACT CODE

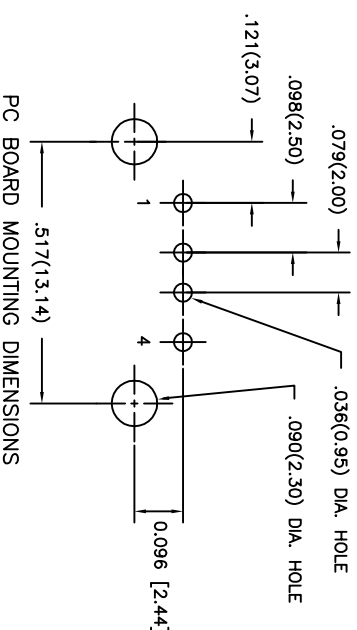

THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

USB CONNECTOR A TYPE, VERTICAL, SINGLE DECK

ACAD REFERENCE NO. 690-004-260-013

DRAWN: J. CHOW DATE: OCT 16/98

CHECKED: DATE:

SCALE: (IN C.A.D. 1:1) SHEET 1 OF 1

DRAWING NUMBER

690-004-260-013

ISSUE

13

ISSUE NUMBER

RE-DWG.	APR.22/08	(5)
F.BRIONES	SEP.14/08	(6)
RE-DWG.	JUN.29/10	(7)
F.BRIONES	JUN.29/10	(8)
TAILS DIM'S ADDED	JUN.22/11	(9)
TOLERANCES ADDED	JUN.29/11	(10)
F.BRIONES	JUN.26/14	(11)
ADD NOTES FORCES	SEPT.12/14	(12)
NEW METAL SHELL	APR.11/2016	(13)
R.STA.MONICA	OCT.30/2016	