




TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.30
.XX	±0.20
.XXX	±0.10
.XXXX	±0.05



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

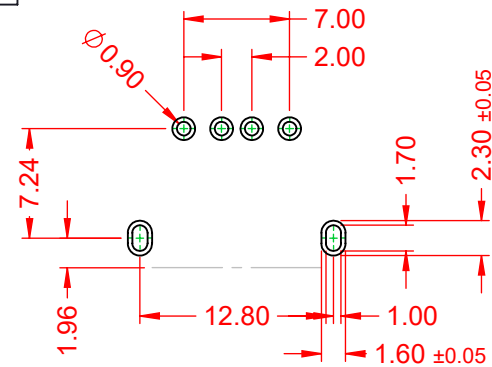

ISSUE NUMBER	
ORIGINAL	①




RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW - TOL' = ±0.03

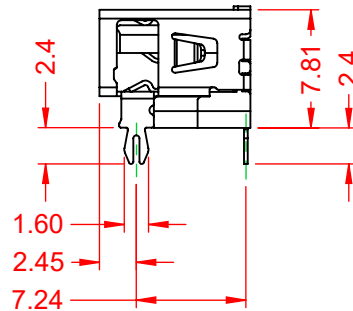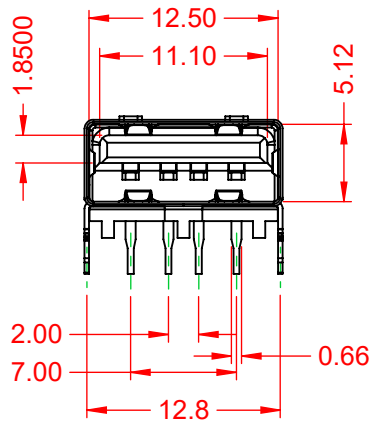

NOTE:
ELECTRICAL SPECIFICATIONS:
 VOLTAGE RATING: 30V MAX.
 CURRENT RATING: 1.5A
 CONTACT RESISTANCE: 30mΩ MAX.
 INSULATOR RESISTANCE: 1000MΩ min.
 DIELECTRIC WITHSTANDING
 VOLTAGE: 500V AC
 OPERATING TEMPERATURE: -40°C ~ 85°C

MATERIAL & FINISH:
 SHELL: COPPER ALLOY, NICKEL PLATED
 HOUSING: PBT, BLACK IN COLOUR, UL94V-0
 CONTACTS: COPPER ALLOY, 3µ" GOLD PLATED



690 SERIES RECEPTACLES USB TYPE-A RIGHT ANGLE PCB		ACAD REFERENCE NO.: 690A104-123-621	
		DRAWN: C.B	DATE: January 18, 2021
EDAC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	DATE:
		SCALE: 2:1	SHEET 1 OF 1
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWING NUMBER: 690A104-123-621
			PART NUMBER: 690A104-123-621
			ISSUE 1



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.