

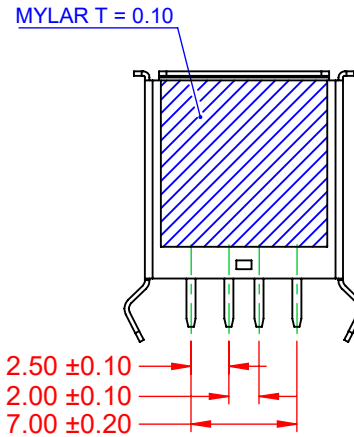
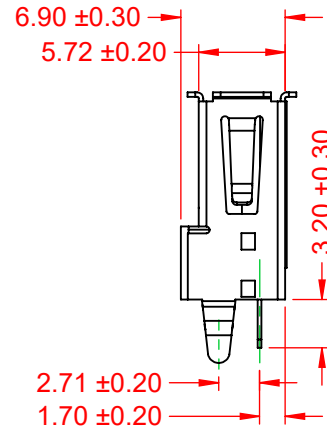
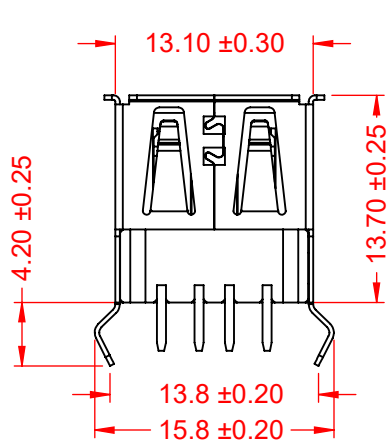


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	
ORIGINAL	①

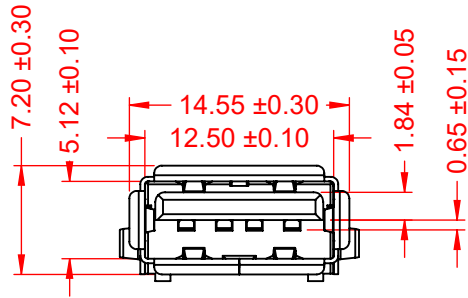

NOTES:

MATERIAL	BRASS, T=0.30m
SHELL:	NICKEL/TIN PLATED
SHELL PLATING:	PHOSPHOR BRONZE T=0.25
TERMINAL:	6μ" GOLD PLATED
TERMINAL PLATING:	
HOUSING:	PBT, UL94V-0, BLACK
ELECTRICAL:	
RATED VOLTAGE:	30V
RATED CURRENT:	1.5AMP AT 250V AC
INSULATION RESISTANCE:	1000MΩ MIN
CONTACT RESISTANCE:	30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:	500V AC
ENVIRONMENTAL	
TEMPERATURE RANGE:	-40°C TO +85°C
MECHANICAL:	
INSERTION FORCE:	35N MAX.
EXTRACTION FORCE:	10N

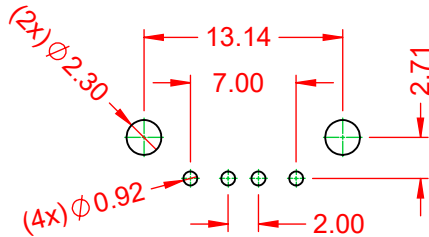

RECOMMENDED P.C.B HOLE LAYOUT  
TOP VIEW (TOLERANCE: ±0.10)

690 SERIES SHORT BODY USB TYPE-A  
RECEPTACLE VERTICAL PCB



EDAC INC  
TORONTO, ONTARIO  
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 690E104-34C-421	
DRAWN: P.M	DATE: DEC 18/2020
CHECKED: C.B	DATE: DEC 18/2020
SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 690E104-34C-421	ISSUE
PART NUMBER: 690E104-34C-421	1



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.