


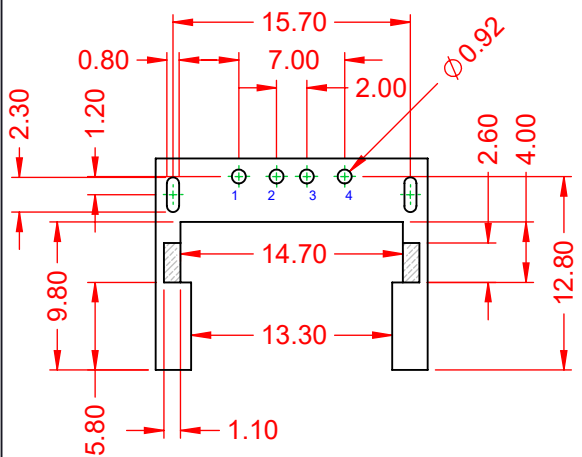
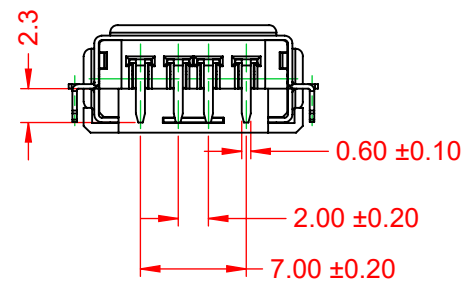
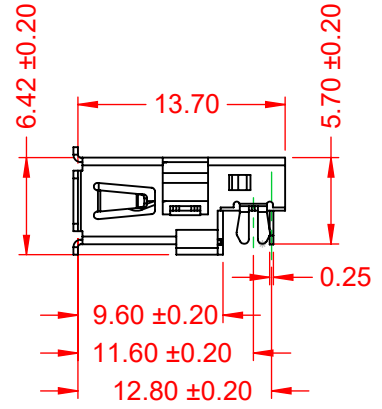


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

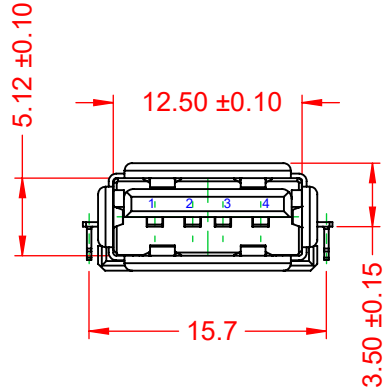

ISSUE NUMBER	1
ORIGINAL	




**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
 CURRENT RATING: 1.5A @ 250V AC  
 VOLTAGE RATING: 30V  
 CONTACT RESISTANCE: 30mΩ MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
 INSULATOR RESISTANCE: 1000MΩ min.  
 OPERATING TEMPERATURE: -40°C-60°C

**MATERIAL & FINISH:**  
 SHELL: NICKEL/TIN PLATED COPPER ALLOY  
 HOUSING: PA6T, BLACK IN COLOUR, UL94V-0  
 CONTACTS: 3μ" GOLD PLATED COPPER ALLOY

RECOMMENDED P.C.B LAYOUT  
TOP VIEW (TOLERANCE:±0.05mm)



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.

105 SERIES - VERTICAL CONTACT PATTERN		ACAD REFERENCE NO.: 690G104-X59-04X	
		DRAWN: C.B	DATE: December 16, 2020
 EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	DATE:
		SCALE: 2:1	SHEET 1 OF 1
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWING NUMBER: 690G104-X59-04X
			PART NUMBER: 690G104-159-041
			ISSUE 1