

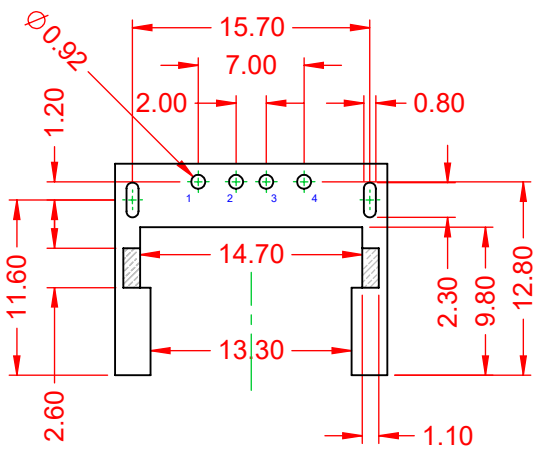
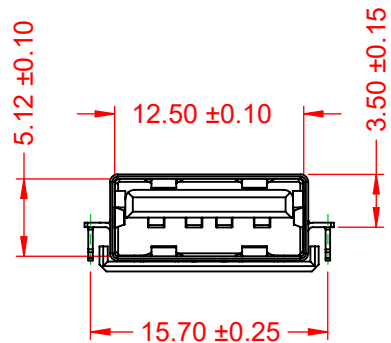
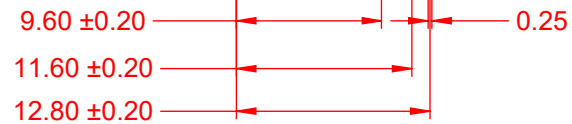
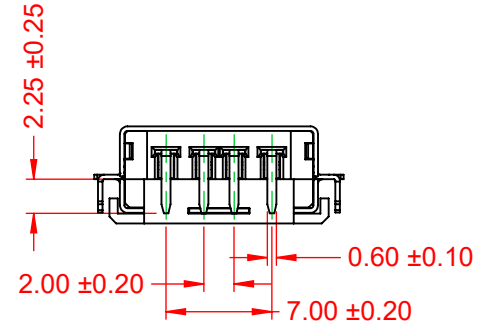
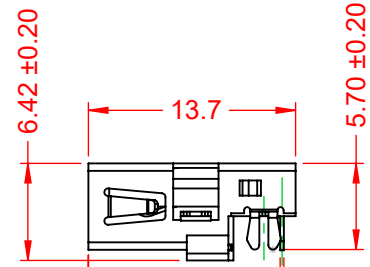


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

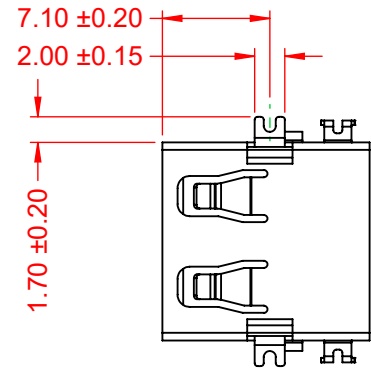


ISSUE NUMBER	
ORIGINAL	①



**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
**VOLTAGE RATING:** 30V MAX.  
**CURRENT RATING:** 1.5A per CONTACT  
**CONTACT RESISTANCE:** 30mΩ MAX.  
**INSULATOR RESISTANCE:** 1000MΩ min.  
**DIELECTRIC WITHSTANDING VOLTAGE:** 500V AC  
**OPERATING TEMPERATURE:** -20°C ~ 60°C

**MATERIAL & FINISH:**  
**SHELL:** T=0.30, NICKEL/TIN PLATED COPPER ALLOY  
**HOUSING:** PA6T, WHITE IN COLOUR, UL94V-0  
**CONTACTS:** 30µ" GOLD PLATED COPPER ALLOY

RECOMMENDED P.C.B LAYOUT  
TOP VIEW (TOLERANCE:±0.05mm)

<b>690 SERIES RECEPTACLES USB TYPE-A MID-MOUNT PCB</b>		ACAD REFERENCE NO.: 690G104-X59-24X	
		DRAWN: C.B	DATE: December 16, 2020
 <b>EDAC INC</b> TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	
		DATE:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		SCALE: 2:1	SHEET 1 OF 1
		DRAWING NUMBER: 690G104-X59-24X	ISSUE 1
		PART NUMBER: 690G104-659-240	1

