

| TOLERANCE UNLESS OTHERWISE SPECIFIED | |
|--|-------|
| .X | ±0.25 |
| .XX | ±0.13 |
| .XXX | ±0.05 |




THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.






ISSUE NUMBER

ORIGINAL

1

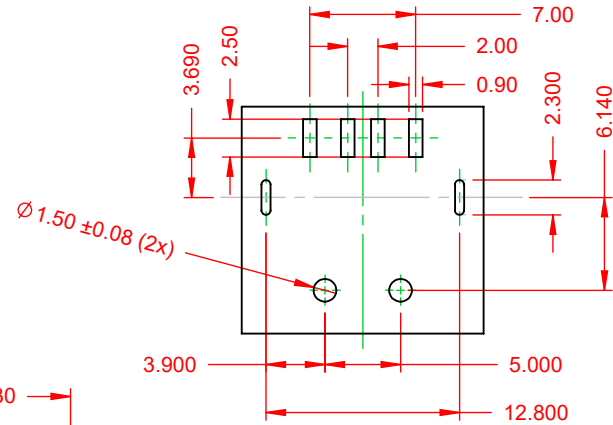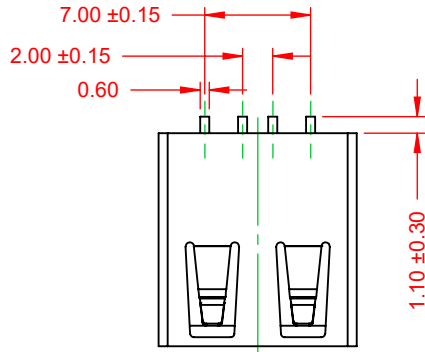

RECOMMENDED P.C.B LAYOUT
TOP VIEW

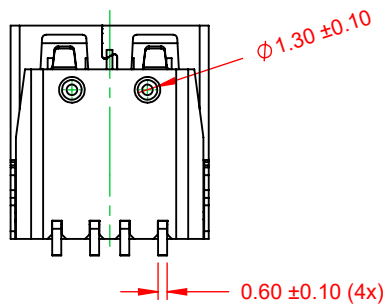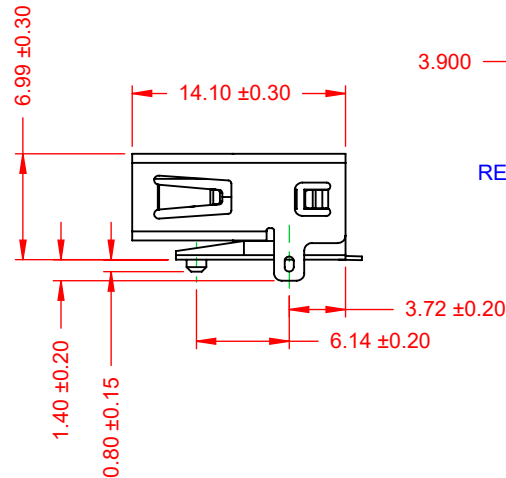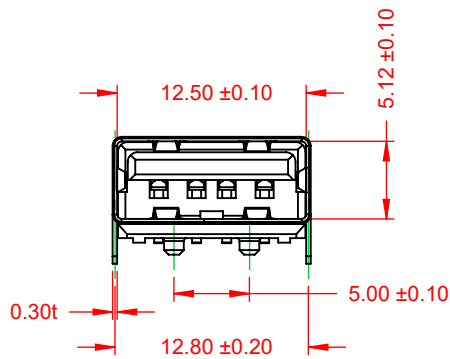

NOTE:

ELECTRICAL SPECIFICATIONS:

| | |
|----------------------------------|----------------|
| VOLTAGE RATING: | 30V |
| CURRENT RATING: | 1.5A @ 250V AC |
| CONTACT RESISTANCE: | 30mΩ MAX. |
| INSULATOR RESISTANCE: | 1000MΩ min. |
| DIELECTRIC WITHSTANDING VOLTAGE: | 500V AC |
| OPERATING TEMPERATURE: | -20°C ~ 85°C |
| CONTACT RETENTION IN HOUSING: | 0.8kgf min. |

MATERIAL & FINISH:

| | |
|-----------|--|
| SHELL: | T=0.30, NICKEL/TIN PLATED COPPER ALLOY |
| HOUSING: | LCP. BLACK IN COLOUR, UL94V-0 |
| CONTACTS: | 30µ" GOLD PLATED COPPER ALLOY |



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

690 SERIES RECEPTACLES USB 2.0
TYPE-A RIGHT ANGLE SMT

| | |
|-------------------------------------|-------------------------|
| ACAD REFERENCE NO.: 690J104-X67-21X | |
| DRAWN: C.B | DATE: December 16, 2020 |
| CHECKED: | DATE: |
| SCALE: 2:1 | SHEET 1 OF 1 |
| DRAWING NUMBER: 690J104-X67-21X | ISSUE |
| PART NUMBER: 690J104-667-211 | 1 |