

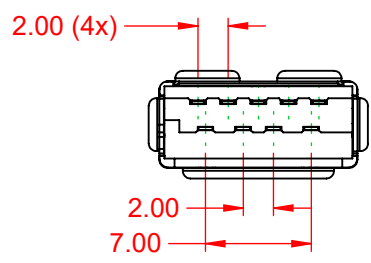



TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05


THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

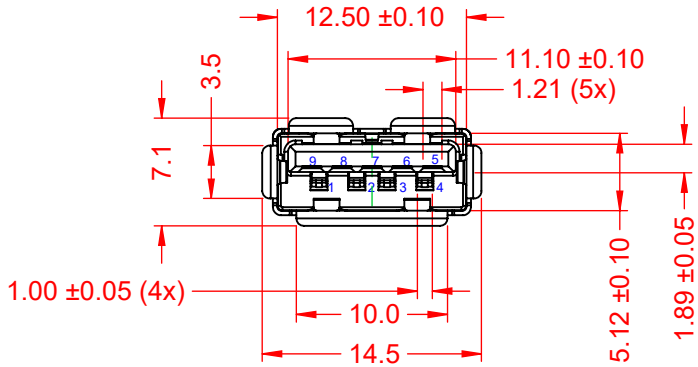

ISSUE NUMBER	
ORIGINAL	①

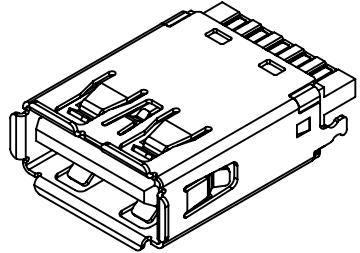

BACK VIEW

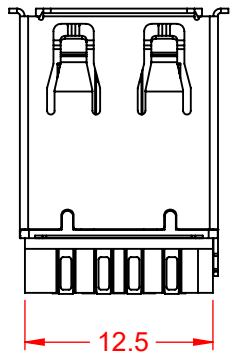

**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
 VOLTAGE RATING: 30V MAX.  
 CURRENT RATING: 1.8A  
 CONTACT RESISTANCE: 30mΩ MAX.  
 INSULATOR RESISTANCE: 100MΩ min.  
 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC  
 OPERATING TEMPERATURE: -25°C ~ 85°C

**MATERIAL & FINISH:**  
 SHELL: COPPER ALLOY, T=0.30, NICKEL PLATING  
 HOUSING: PBT, BLACK IN COLOUR, UL94V-0  
 CONTACTS: COPPER ALLOY, T=0.20, 30μ" GOLD PLATING

<b>690 SERIES RECEPTACLES USB 3.0 TYPE-A CABLE END SOLDER CUP</b>		ACAD REFERENCE NO.: 690M109-XAD-02X	
		DRAWN: C.B	DATE: December 18, 2020
<b>EDAC</b> TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	DATE:
		SCALE: 2:1	SHEET 1 OF 1
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWING NUMBER: 690M109-XAD-02X
			PART NUMBER: 690M109-6AD-021
			ISSUE 1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.