

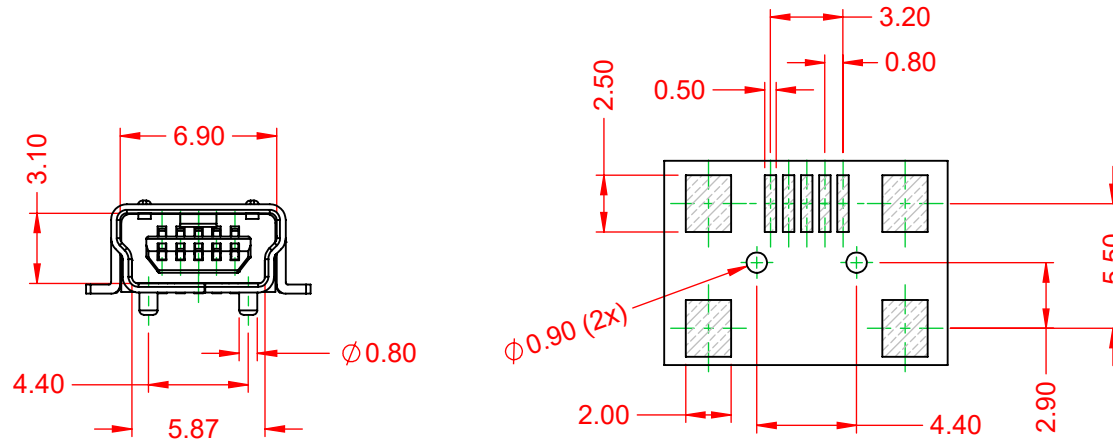


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①

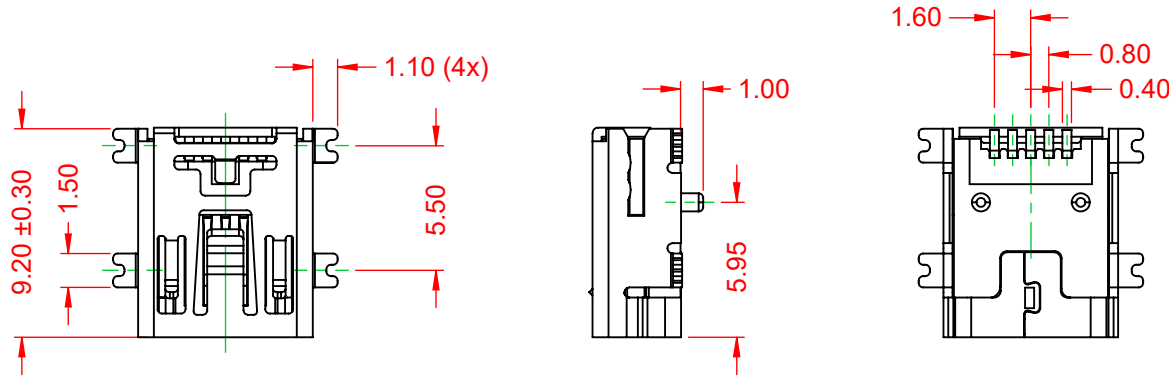

RECOMMENDED P.C.B LAYOUT

NOTE:
ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 1.0A
CONTACT RESISTANCE: 30mΩ MAX.
INSULATOR RESISTANCE: 1000MΩ min. 500V DC
DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
OPERATING TEMPERATURE: -40 °C ~ 85 °C

MATERIAL & FINISH:
SHELL: COPPER ALLOY, T=0.40, NICKEL PLATED
HOUSING: LCP, BLACK IN COLOUR, UL94V-0
CONTACTS: COPPER ALLOY, T=0.25, TIN PLATED TAILS,
 3μ" GOLD PLATED CONTACT AREA



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

690 SERIES RECEPTACLES USB
TYPE-B MINI & MICRO

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 690T205-X6B-211	
DRAWN: C.B	DATE: December 23, 2020
CHECKED:	DATE:
SCALE: 3:1	SHEET 1 OF 1
DRAWING NUMBER: 690T205-X6B-211	ISSUE
PART NUMBER: 690T205-16B-211	1