

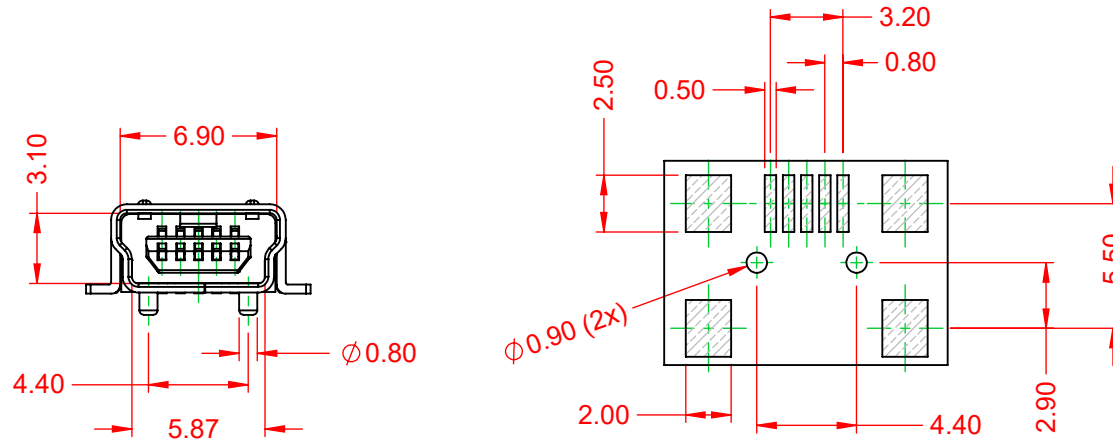


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	①
ORIGINAL	

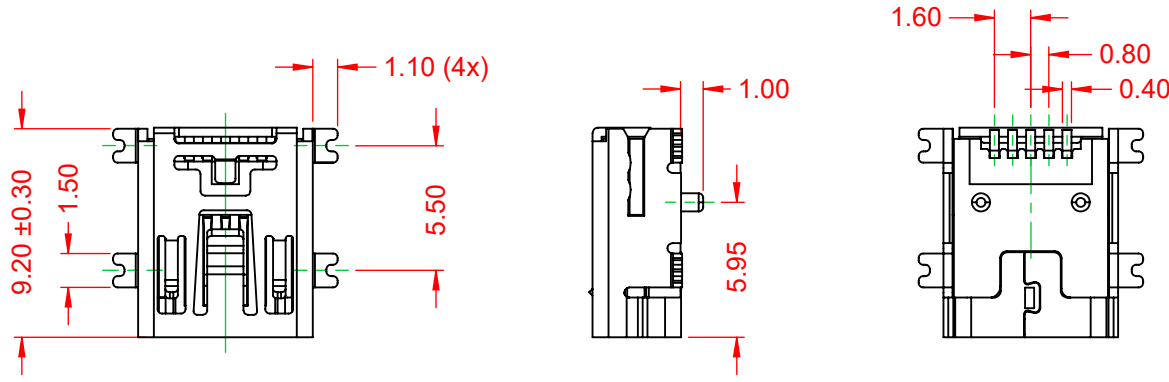

RECOMMENDED P.C.B LAYOUT

NOTE:
ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 1.0A
CONTACT RESISTANCE: 30mΩ MAX.
INSULATOR RESISTANCE: 1000MΩ min. 500V DC
DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
OPERATING TEMPERATURE: -40 °C ~ 85 °C

MATERIAL & FINISH:
SHELL: COPPER ALLOY, T=0.40, NICKEL PLATED
HOUSING: LCP, BLACK IN COLOUR, UL94V-0
CONTACTS: COPPER ALLOY, T=0.25, TIN PLATED TAILS,
 GOLD FLASH PLATED CONTACT AREA

690 SERIES RECEPTACLES USB TYPE-B MINI & MICRO		ACAD REFERENCE NO.: 690T205-X6B-211	
		DRAWN: C.B	DATE: December 23, 2020
EDAC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	
		DATE:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		SCALE: 3:1	SHEET 1 OF 1
		DRAWING NUMBER: 690T205-X6B-211	ISSUE 1
		PART NUMBER: 690T205-26B-211	1



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.