


TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:
 0.0 ± 0.20 ANGLE x°
 0.00 ± 0.10
 0.000 ± 0.05





THIS IS A C.A.D. GENERATED DRAWING.
 DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	①
ORIGINAL	②
COLOR WHITE WAS BLACK ADD NOTES 3 & 4 R.STA.MONICA JUN.18/2014	

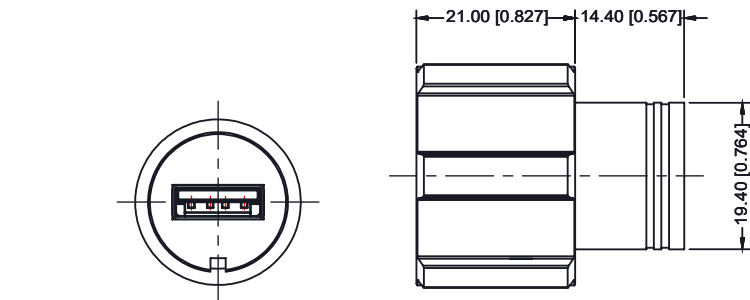

1. MATERIAL :
- 1-1. EXTERNAL HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. EXTERNAL NUT : PBT UL94V-0 ; COLOR : BLACK
 - 1-3. O-RING : SILICONE ; COLOR : BROWN
 - 1-4. USB :
 - 1-4-1. HOUSING : PBT UL94V-0 ; COLOR : WHITE
 - 1-4-2. CONTACT : PHOSPHOR BRONZE.
 - 1-4-3. SHELL : SPTe

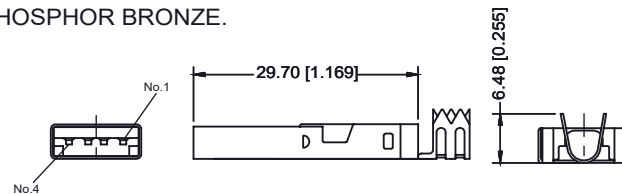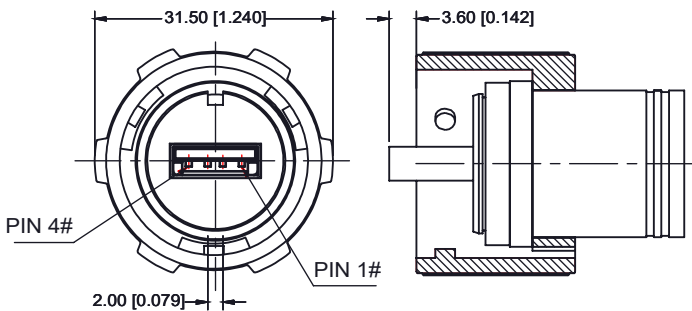

2. FINISH :
- 2-1. CONTACT : GOLD 15u" ON CONTACT AREA
SOLDER TAILS: TIN 100u"
UNDER PLATE : NICKEL PLATING
 - 2-2. SHELL: NICKEL OVER ALL
3. ELECTRICAL SPECIFICATIONS:
- 3-1. RATED CURRENT : 1A
 - 3-2. RATED VOLTAGE : 30V
 - 3-3. WATER PROOF : IP67
4. ENVIRONMENTAL:
- 4-1. OPERATING TEMPERATURE : -20°C~85°C

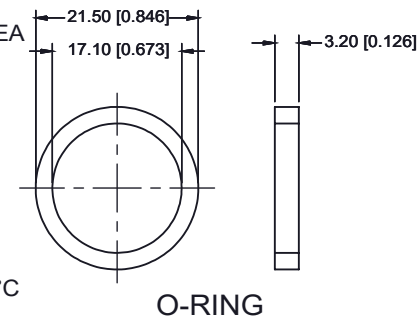

G-seal
 Waterproof Connectors



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
 TORONTO, ONTARIO
 CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

WATERPROOF USB TYPE A, 4P
 (MALE)

ACAD REFERENCE NO.: 690-W04-X60-013

DRAWN:R.STA.MONICA DATE: APR.07/2014

CHECKED: DATE:

PART NUMBER
690-W04-360-013 SHEET 1 OF 1

DRAWING NUMBER
690-W04-360-013 ISSUE
 2